
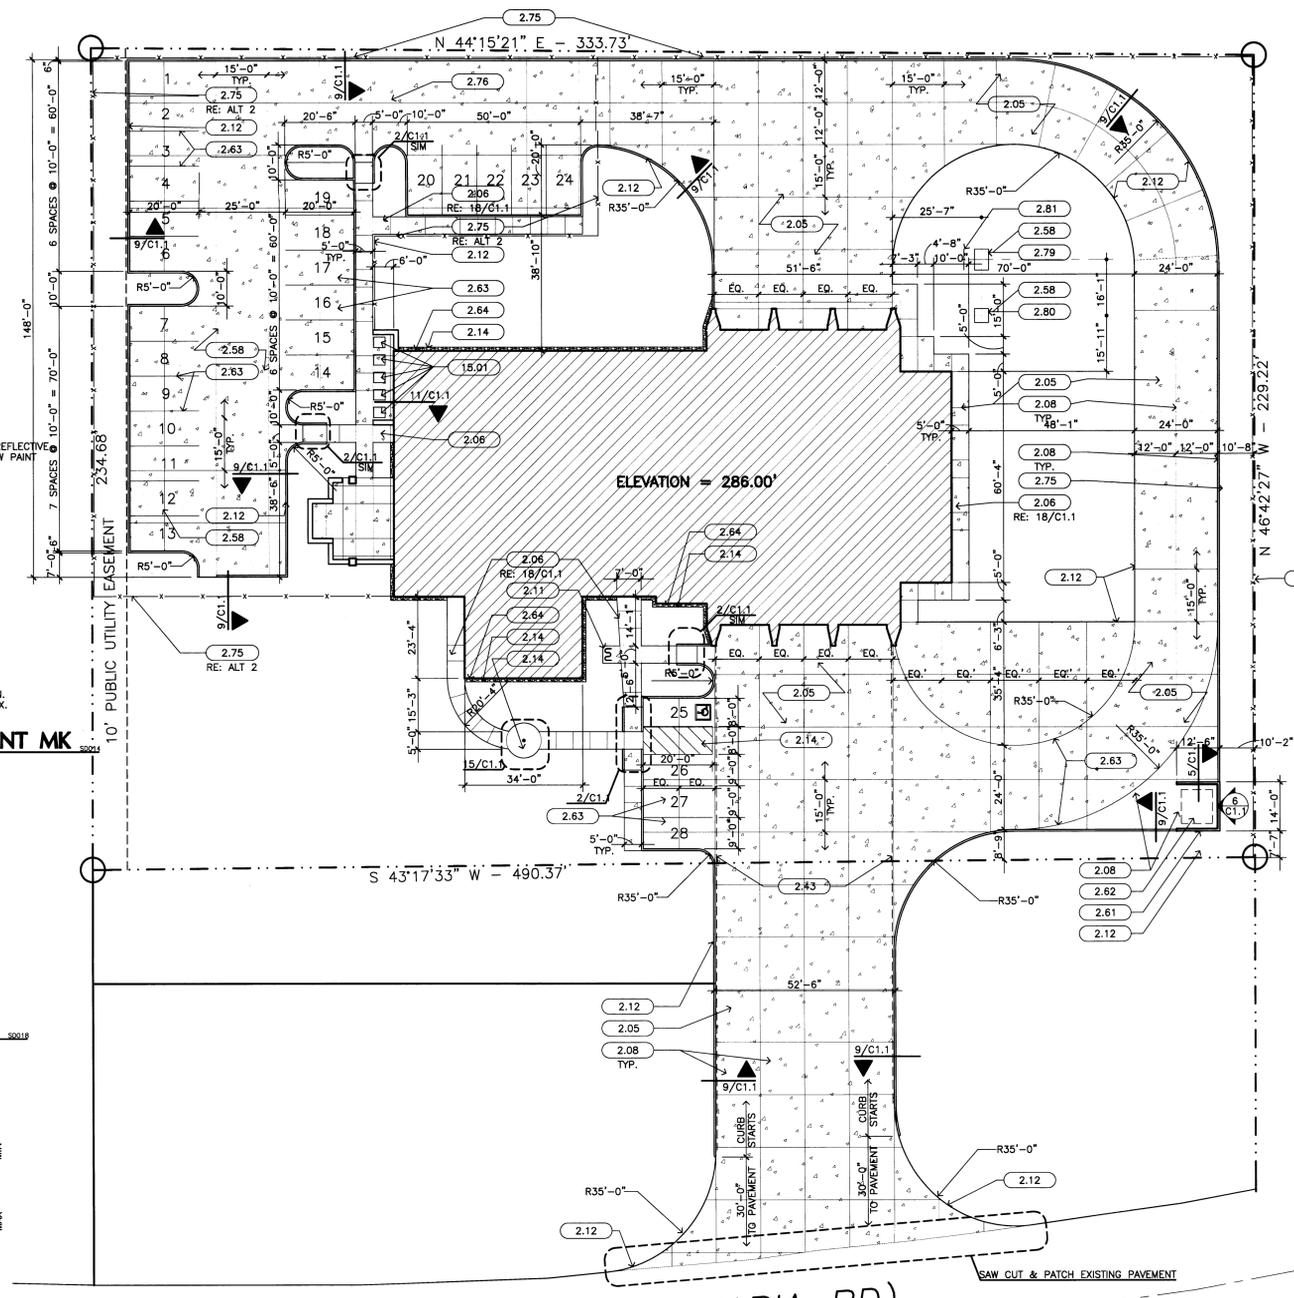
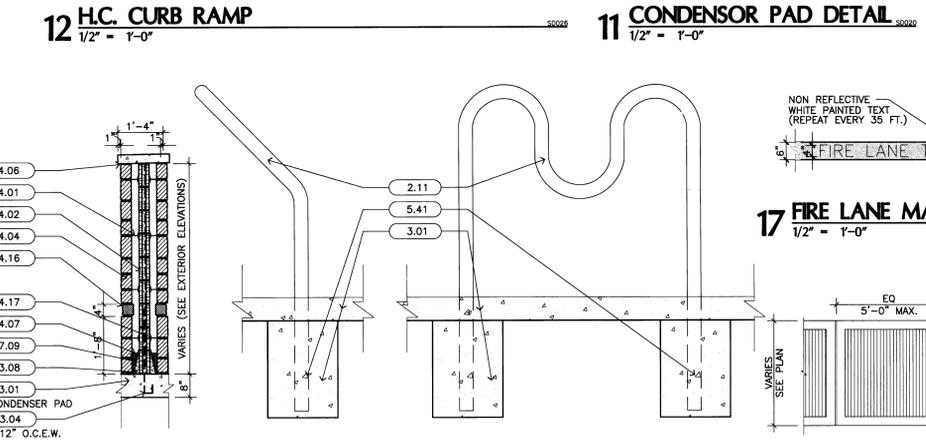
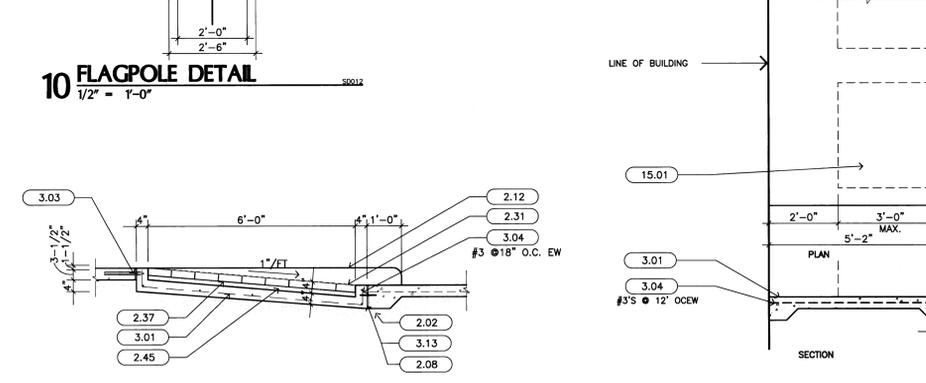
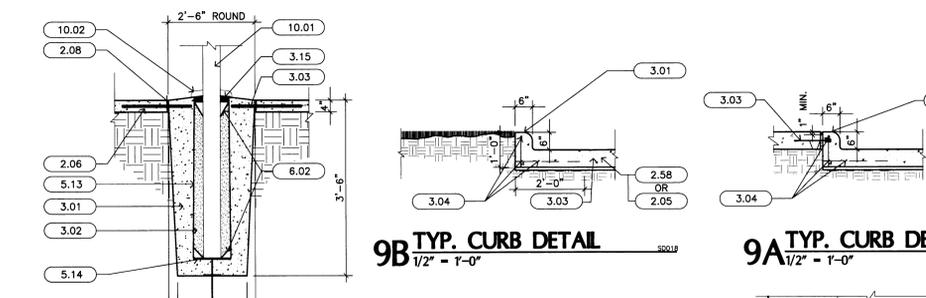
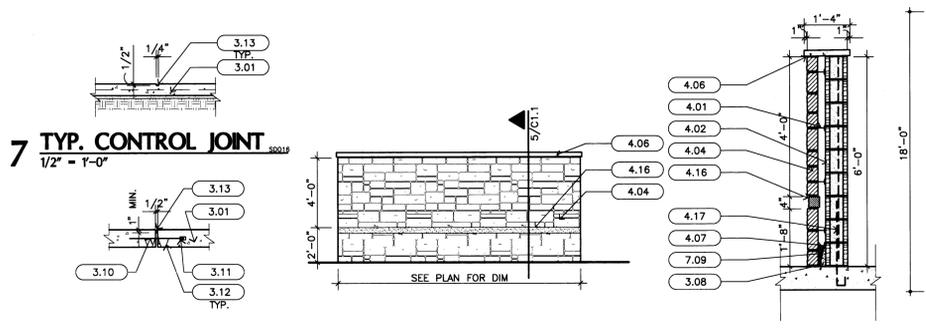


KEYNOTES

- 2.00 SITE WORK
- 2.01 FINISH GRADE
- 2.02 COMPACTED SELECT FILL
- 2.04 PREPARED SOIL MIX
- 2.05 8" CONCRETE PAVING WITH #4'S @ 1'-0" O.C. EACH WAY OVER COMPACTED SUBGRADE
- 2.06 4" CONCRETE SIDEWALK WITH #3'S @ 1'-0" O.C. OVER COMPACTED SUBGRADE
- 2.08 1/2" EXPANSION JOINT (RE:8/C1.1)
- 2.09 4" PAVING MARKING (DIAGONAL STRIPING AT 2'-0" O.C.) (TYPICAL RE:4/C1.1)
- 2.11 BICYCLE RACK (RE: 19/C1.1)
- 2.12 6" CONCRETE CURB (WITH GUTTER AS REQUIRED) (RE:9/C1.1)
- 2.13 METAL EDGING
- 2.15 STEEL STAKE
- 2.19 LIGHT BROOM FINISH TYP.
- 2.20 STEEL TROWEL FINISH TYP.
- 2.31 ENDCOIT BRICK ADA WARNING PAVER (2'-3/8" X 4" X 8")
- 2.37 GEOTEXTILE TURN UP AT SIDES TO COVER PAVERS
- 2.43 FIRE LANE PAVEMENT MARKING (RE: 16A/C1.1)
- 2.45 BEDDING SAND
- 2.58 5" CONCRETE PAVING WITH #4'S @ 1'-4" O.C. EACH WAY OVER COMPACTED SUBGRADE
- 2.61 DUMPSTER SCREEN WALL
- 2.62 DUMPSTER (NIC)
- 2.63 4" PAVEMENT MARKING
- 2.64 LIMESTONE CAP
- 2.75 METAL FENCE
- 2.76 METAL GATE
- 2.79 GENERATOR PAD
- 2.80 TRANSFORMER PAD
- 2.81 WOOD FENCE
- 3.00 CONCRETE
- 3.01 CONCRETE
- 3.02 TAMPED, SCREED DRY SAND
- 3.03 DOWELS INTO CONCRETE SLAB
- 3.04 STEEL REINFORCING
- 3.08 FILL WITH GROUT
- 3.10 3/4" X 2'-0" SMOOTH DOWELS @ 2'-0" O.C.
- 3.11 DOWEL SLEEVE
- 3.12 DOWEL SUPPORT
- 3.13 FILL WITH JOINT SEALER 1/4" BELOW SURFACE
- 3.15 LEAD CAULKING OVER WATERPROOF CEMENT GROUT
- 4.00 MASONRY
- 4.01 ADJUSTABLE MASONRY WALL TIES @ 16" O.C.E.W.
- 4.02 8" CONCRETE MASONRY UNIT
- 4.04 LIMESTONE
- 4.06 3" LIMESTONE CAP
- 4.07 MORTAR NET
- 4.16 1/2" HORIZONTAL LIMESTONE BAND (STONE TYPE 2)
- 4.17 VERTICAL REINFORCING
- 5.00 METALS
- 5.13 PIPE SLEEVE
- 5.14 1/2" STEEL PLATE W/ 3/4" DIAMETER LIGHTNING ARRESTOR SPIKE EXTEND 2'-0" BELOW CONCRETE EMBEDDED TUBE
- 5.41
- 6.00 WOOD & PLASTIC
- 6.02 WOOD WEDGE
- 7.00 THERMAL & MOISTURE PROTECTION
- 7.09 THROUGH-WALL FLASHING (WITH WEEPS AT 2'-0" O.C.)
- 10.00 SPECIALTIES
- 10.01 FLAGPOLE
- 10.02 FLAGPOLE COLLAR
- 15.00 MECHANICAL (RE: MECHANICAL DRAWINGS)
- 15.01 HVAC CONDENSING UNIT W/ DISCONNECT. INSTALL ON CONCRETE PAD (RE: CIVIL)
- 16.00 ELECTRICAL (RE: ELECTRICAL DRAWINGS)
- 16.08 ADJUSTABLE FLAGPOLE LIGHT

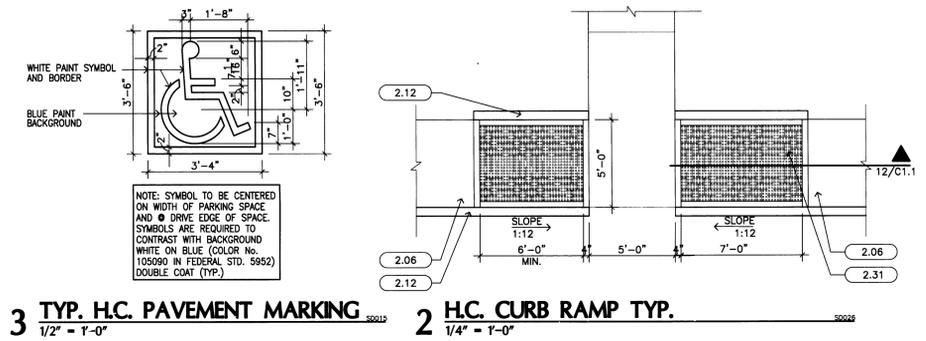

NOTES

SEE SHEET C2.2 FOR UTILITY PLAN

ALL SIGNS WILL BE PERMITTED SEPARATELY

BUILDING HEIGHT IS 34'-6"

AREA OF SITE IS 1.788 ACRES

ALL DISTURBED EARTH MUST BE 100% COVERED WITH ESTABLISHED GRASS SEED OR GROUNDCOVER PRIOR TO C.O.

ALTERNATES

ALTERNATE 1: SUBSTITUTE COMPOSITION SHINGLE ROOF FOR STANDING SEAM METAL ROOF

ALTERNATE 2: DELETE FENCE AROUND PARKING LOT

ALTERNATE 3: SUBSTITUTE VCT FOR ALL CERAMIC TILE EXCEPT IN BATHROOMS

ALTERNATE 4: DELETE DORMER ABOVE BEDROOM HALL


ALTERNATE 5: DELETE DORMER ABOVE BEDROOM HALL

ALTERNATE 6: SUBSTITUTE DRILLED PIER AND SUBGRADE SUPPORTED SLAB FOR STRUCTURAL SLAB IN APPARATUS BAY (RE: S1.6)

ALTERNATE 7: DELETE ONE DOUBLE-DEEP BAY

ALTERNATE 8: SUBSTITUTE ALTERNATE ENTERTAINMENT CENTER (RE:20/A3.2)

NOT FOR CONSTRUCTION



95% CONSTRUCTION DOCUMENTS

DATE: SEPTEMBER 4, 2007
DRAWN BY: BG
CHECKED BY: RR
PROJECT NO.: 2703.00

C1.1