

- ### Construction Notes:
- 12'x12' dumpster pad w/ 10' apron, 8" thick reinforced concrete w/ #5 rebar 12" OCEW and w/ 6" tall wooden fence screen. See detail on Sheet SP-2.
  - All proposed sewer cleanouts that are to be placed within a concrete sidewalk shall be set at the same grade as the sidewalk and utilize a flush mount, brass cap, so that there are no tripping hazards.
  - All fill subgrade and base material shall be compacted to 98% STD in areas to be paved and 95% STD in all other areas.
  - All items to be removed during clearing and grubbing. Remove not only the above ground elements, but all underground elements as well. All excavated material shall become the property of the contractor unless otherwise directed by the Owner. All debris must be disposed of off site.
  - Prior to grading operations, contractor is to strip the first 6" of soil. Contractor shall proof roll the entire site and remove any unstable materials according to TxDOT Specifications. Select fill is to be used in replacing objectionable material.
  - Assure positive drainage across project site to the storm water structures.
  - The proposed limestone gravel pavement area shall follow the same detail and specifications as the asphalt parking lot, omitting the prime coat and asphalt-cement wearing surface. Limestone gravel surface shall be rolled smooth to finish grade.
  - Each utility contractor is responsible for positioning and trenching of service lines. Mark all lines with utility tape. Utility contractors are responsible for coordinating with paving contractor in placement and installation of any necessary utility conduit prior to subgrade preparation. Lines requiring slope control are to be installed first. All other lines not requiring slope control or elevation shall be installed deepest first. Each contractor is responsible for knowing final determination of installation order.
  - Materials and methods for pavement markings shall conform to TxDOT Standard Specifications for Construction of Highways, Streets, and Bridges (current edition), with the following exceptions: 1) Type II marking materials need not be purchased from the Department, and 2) Glass beads may be omitted, but marking material shall be Type II paint-type material.
  - Fire Sprinkler System - potable water supply must be protected by testable double check valve assembly, and install as per City Ordinance.
  - Potable Water Protection - All devices, appurtenances, appliances, and apparatus intended to serve some special function and that connects to the water supply system, shall be provided with protection against backflow and contamination of the water supply system.
  - The Contractor shall be responsible for the containment and proper disposal of all liquid and solid waste associated with this project. The Contractor shall use all means necessary to prevent the occurrence of windblown litter from the project site.
  - Demolition/Construction Waste - Site is required to provide containment for waste prior to and during demolition/construction. Solid waste roll off boxes and/or metal dumpsters shall be supplied by City to permitted contractor(s) only.
  - Where electric facilities are installed, BTU has the right to install, operate, relocate, construct, reconstruct, add to, maintain, inspect, patrol, enlarge, repair, remove and replace said facilities upon, over, under, and across the property included in the PUE, and the right of ingress and egress on property adjacent to the PUE to access electric facilities.




- ### Site Specific Notes:
- Current owner of Block 1, Lot 3 of Carrabba Industrial Park, Phase 11, is GRT Interests, Inc., PO Box 663, Bryan, Texas 77806, (979) 778-8850, Grant Carrabba - Vice President.
  - Proposed use and improvements: wholesale/fabrication facility including assorted parking, utilities, & landscaping. Facility will not be used for woodworking or the storage/manufacture of upholstered furniture.
  - This lot is not within the 100-YR floodplain according to the DFIRM for Brazos County, Texas and Incorporated areas, Map No. 48041C0205F, effective April 2, 2014.
  - Current Zoning of the property is Industrial District (I).
  - Total lot acreage is 2.79 Acres.
  - All minimum building setbacks shall be in accordance with the City of Bryan Code of Ordinances.
  - Developer/Tenant to submit electrical load information when requesting electrical service from BTU. Contact Line Design @ 821-5770.
  - Access gates shall be manually operated and secured with a chain and pad lock.
  - There are no paint spraying operations anticipated for this development.
  - Mesh Netting will be installed on the chainlink fence in order to screen the open storage yard from the ROW.

- ### Paving Notes:
- The subgrade beneath the concrete sidewalks shall be compacted and "proof-rolled". Any weak or soft areas identified by the "proof-rolling" shall be removed and replaced.
  - A sand leveling course under concrete pavement is NOT permitted.
  - Joint sealant material to be Sonneborn SL-1 or approved equal.
  - Curing compound shall be applied uniformly to the concrete after the surface finishing is complete at the rate recommended by the manufacturer. The curing compound shall meet the requirements of TxDOT Item 526.
  - All concrete for pavement construction shall be to the minimum depth shown on the plans and shall have a minimum 28-day compressive strength of 4000 PSI. The maximum percentage of fly ash replacement of portland cement shall be 20 percent by weight.
  - Contractor shall provide engineer with a proposed pavement expansion and contraction joint plan prior to pavement construction.

### Subgrade Stabilization Table:

PI = Plasticity Index	LL = Liquid Limit	
If PI >20 and LL <35, Then Lime Stabilize Subgrade		
If PI >15 and LL >36, Then Lime Stabilize Subgrade		
If PI <5, Then Cement Stabilize Subgrade		
Acceptable soils other than those defined by the limits above, do not require stabilization.		
PI	% Required	Material
<5	5%	Cement
<25	5%	Lime
26-33	6%	Lime
34-40	7%	Lime
>40	Determined by ASTM C977 Lime	

Joints to be Tooled 1" Deep and sealed with Sonneborn SL-1 or approved equal

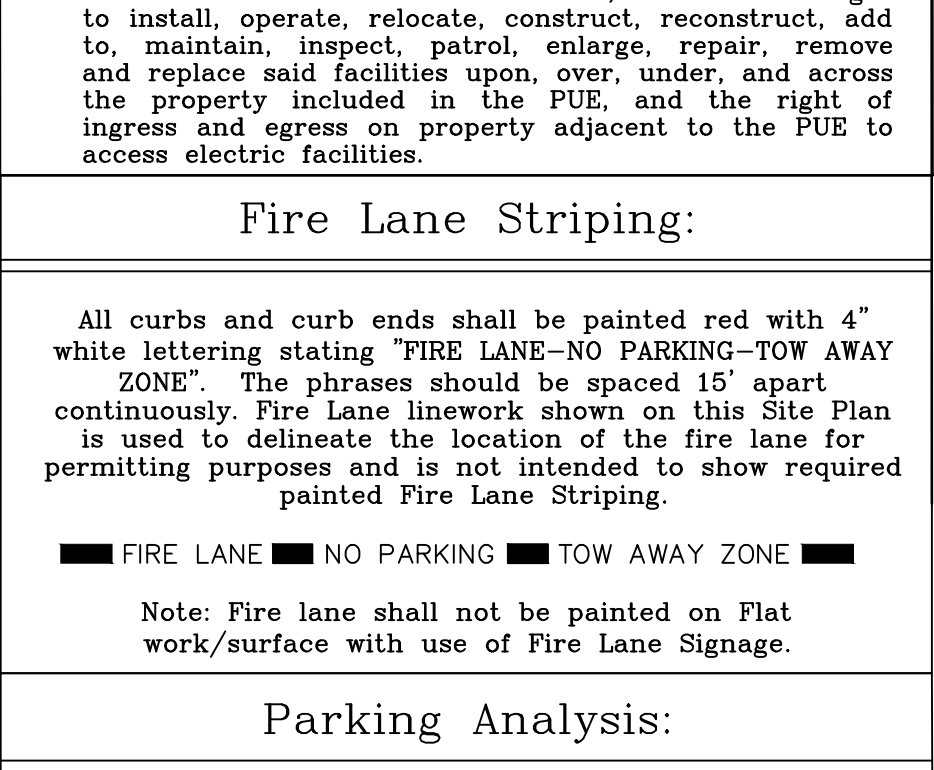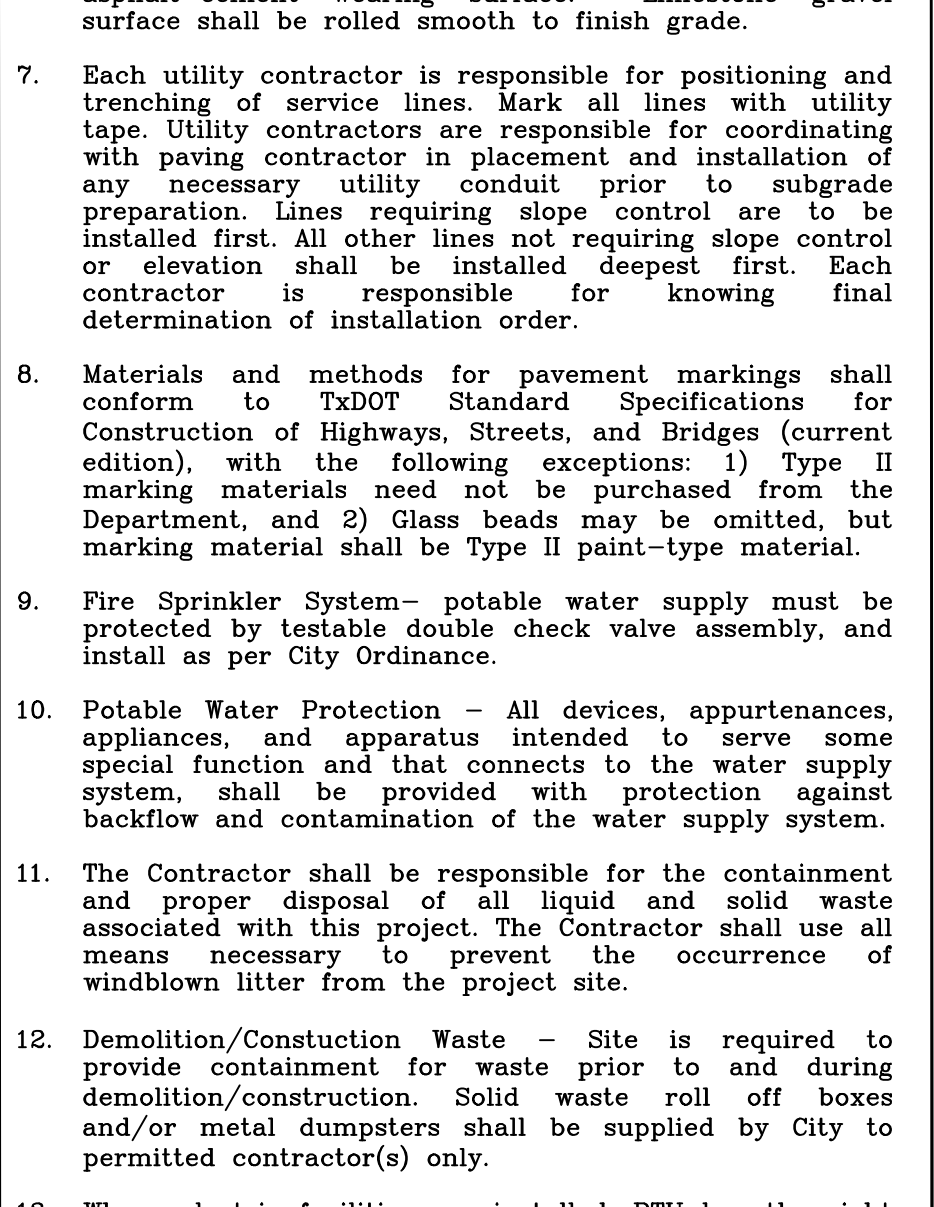

### Parking Analysis:



Proposed Improvements:	SF Building	SF Limestone Gravel Yard
6,000	22,000	

**New Required Parking:**

6...	1 Space per 1000 SF Building
11...	1 Space per 2000 SF Yard
17...	Total Required














**New Provided Parking:**

10...	Straight in Parking
2...	ADA Parking
5...	Bay Parking
17...	Total Provided

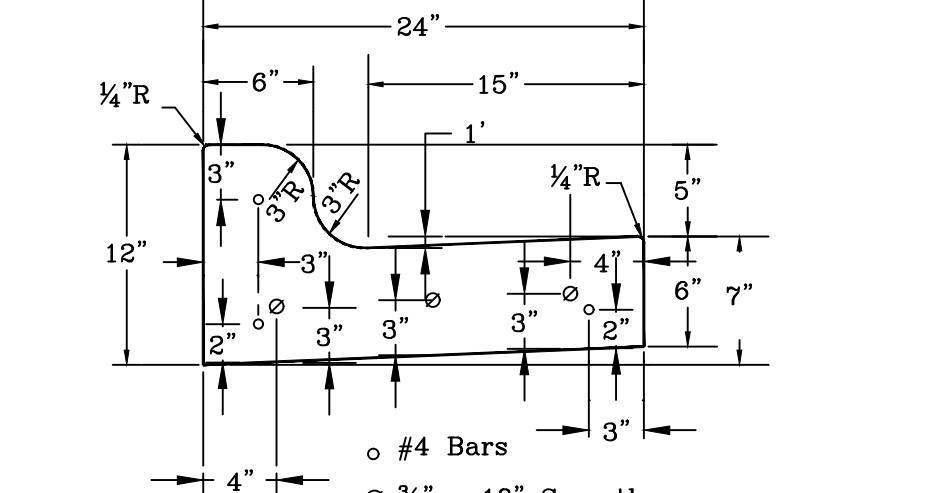

### CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA	CHORD DIRECTION	CHORD LENGTH	TANGENT
C1	307.42'	770.00'	22° 52' 31"	N 49° 25' 44" E	305.38'	155.79'

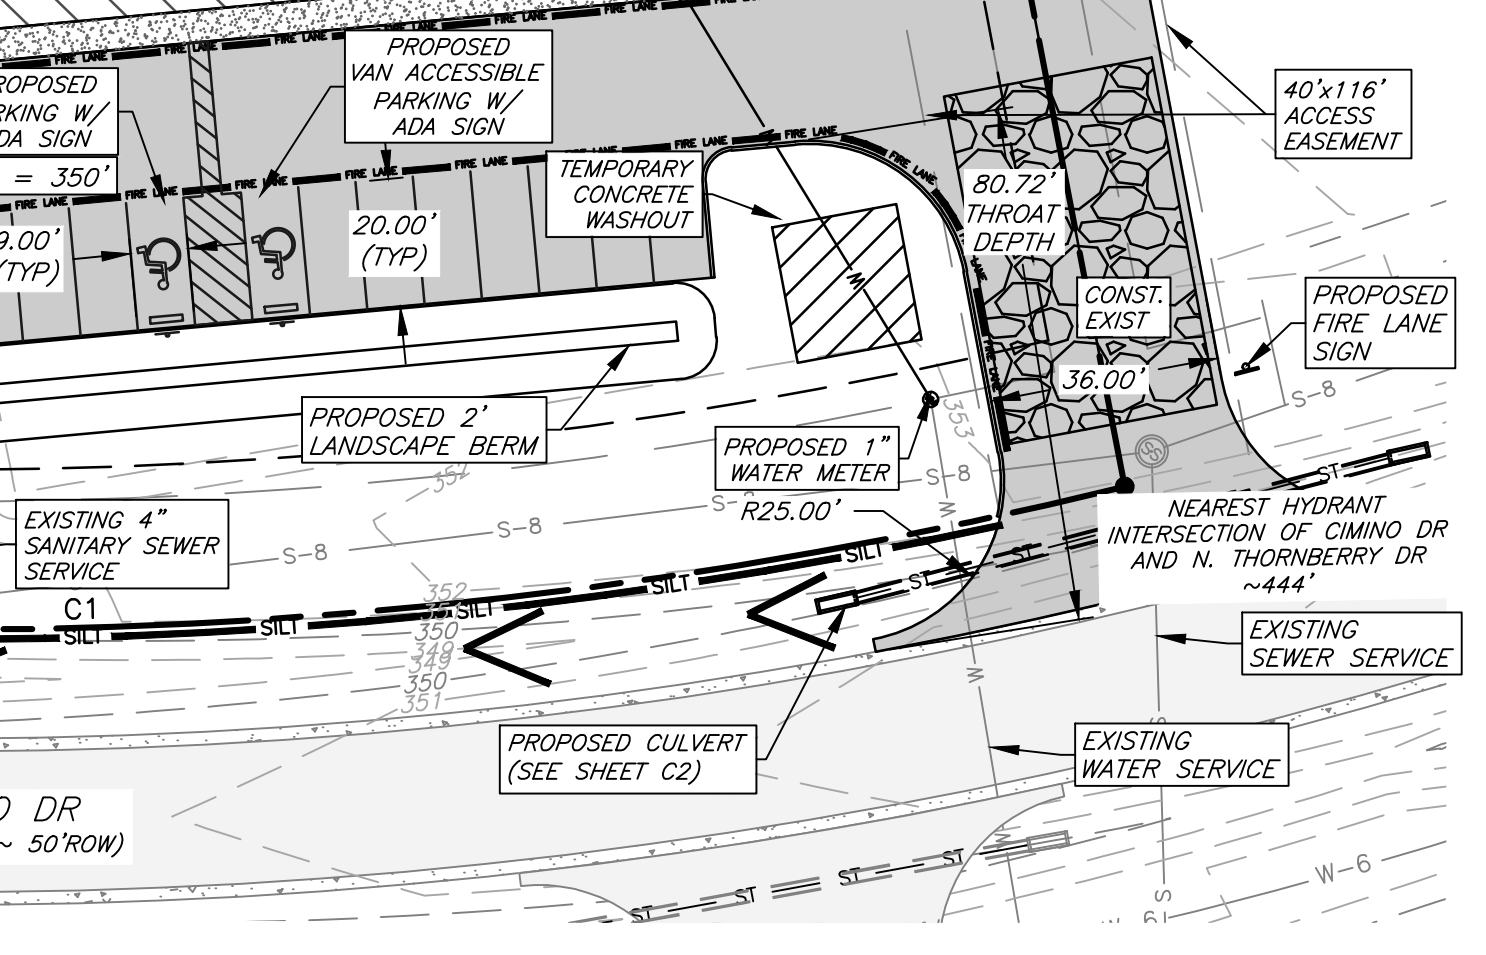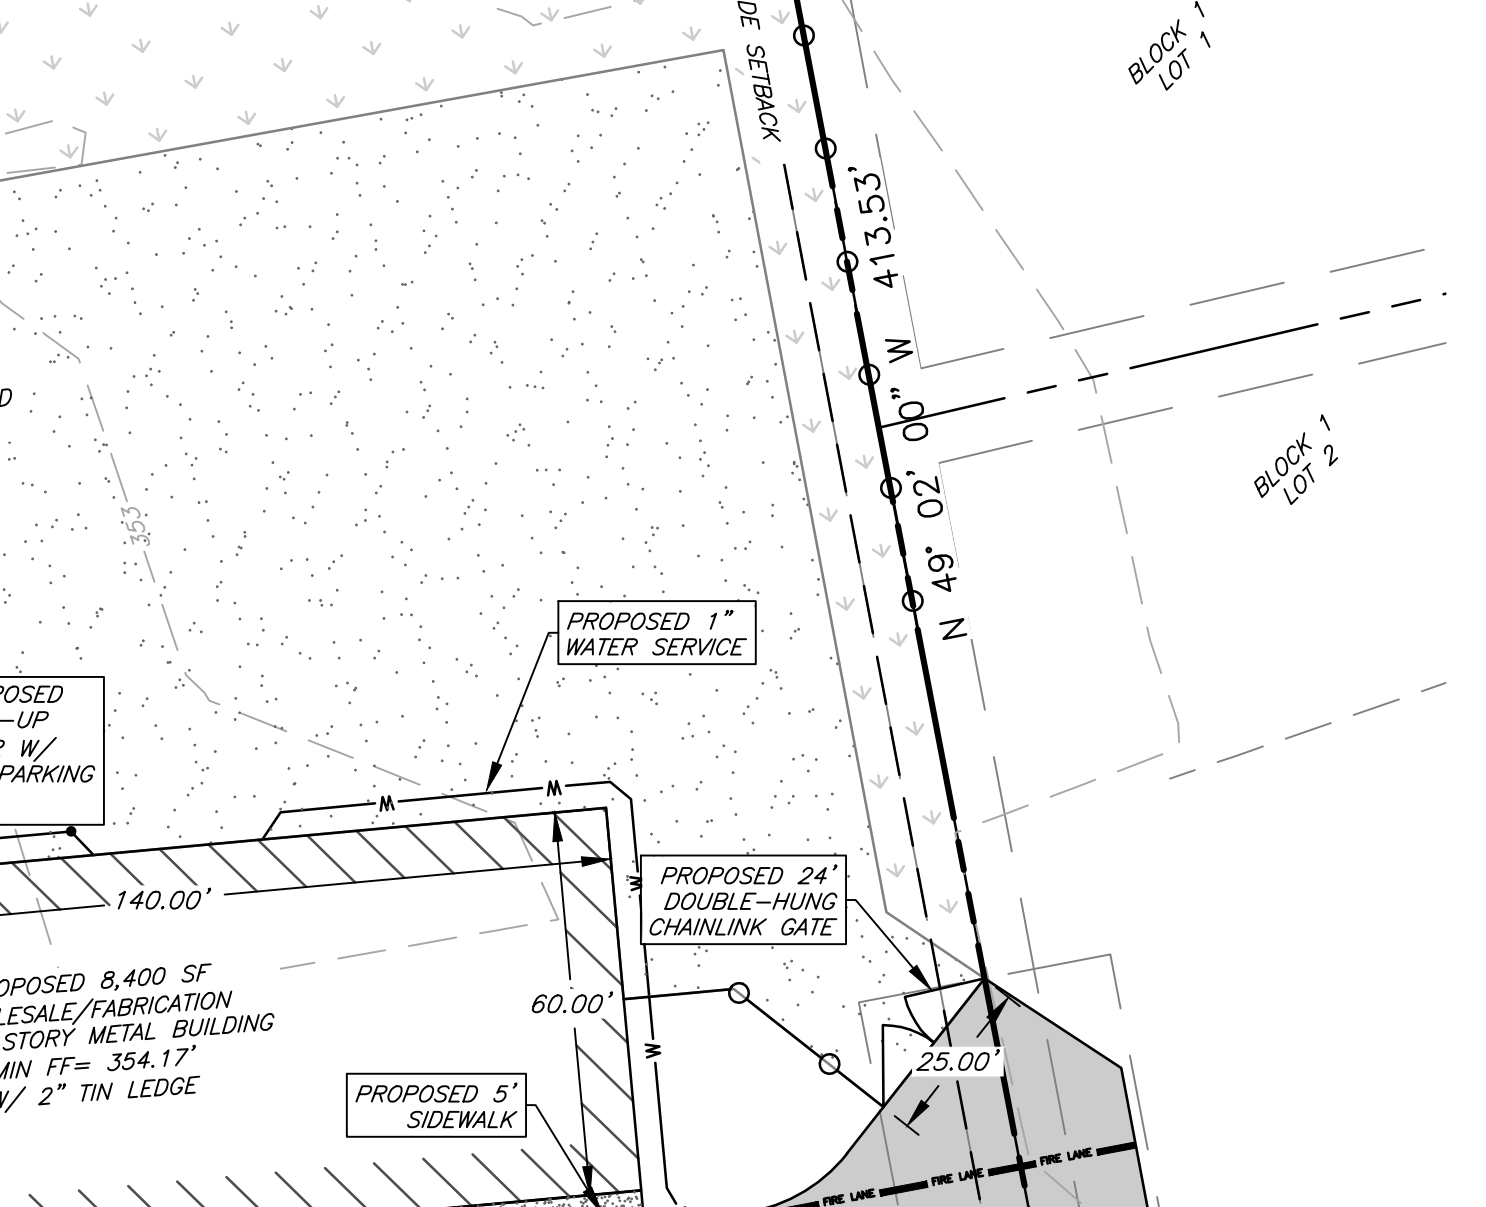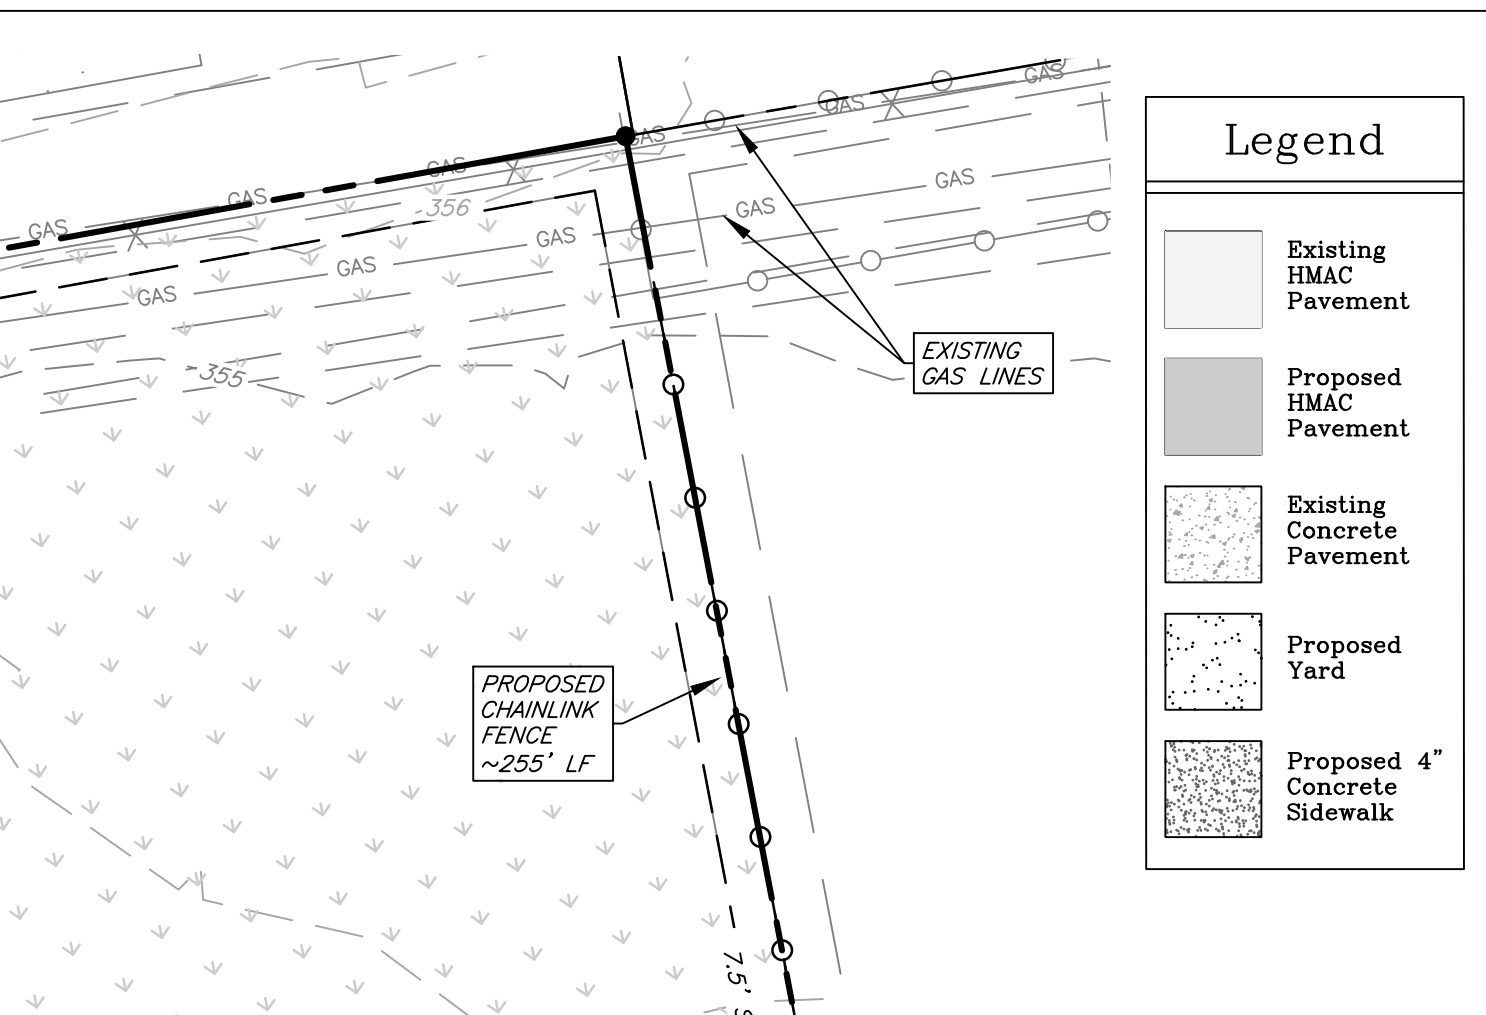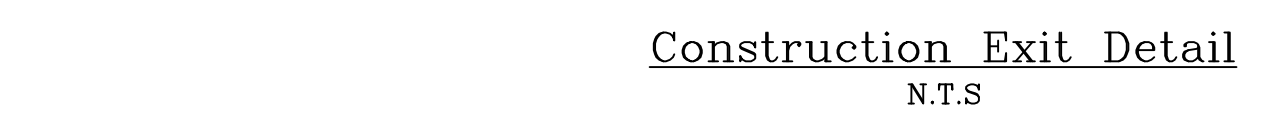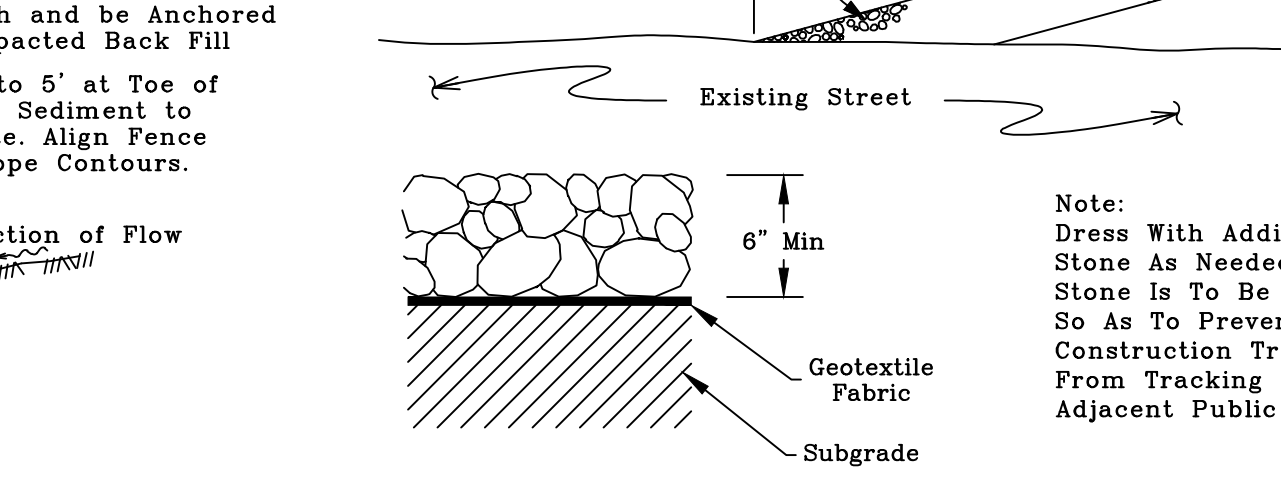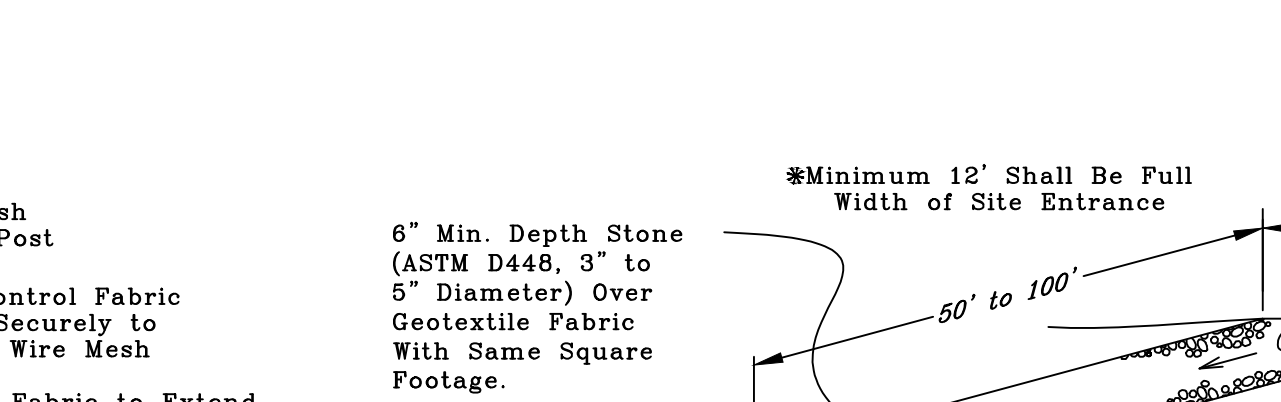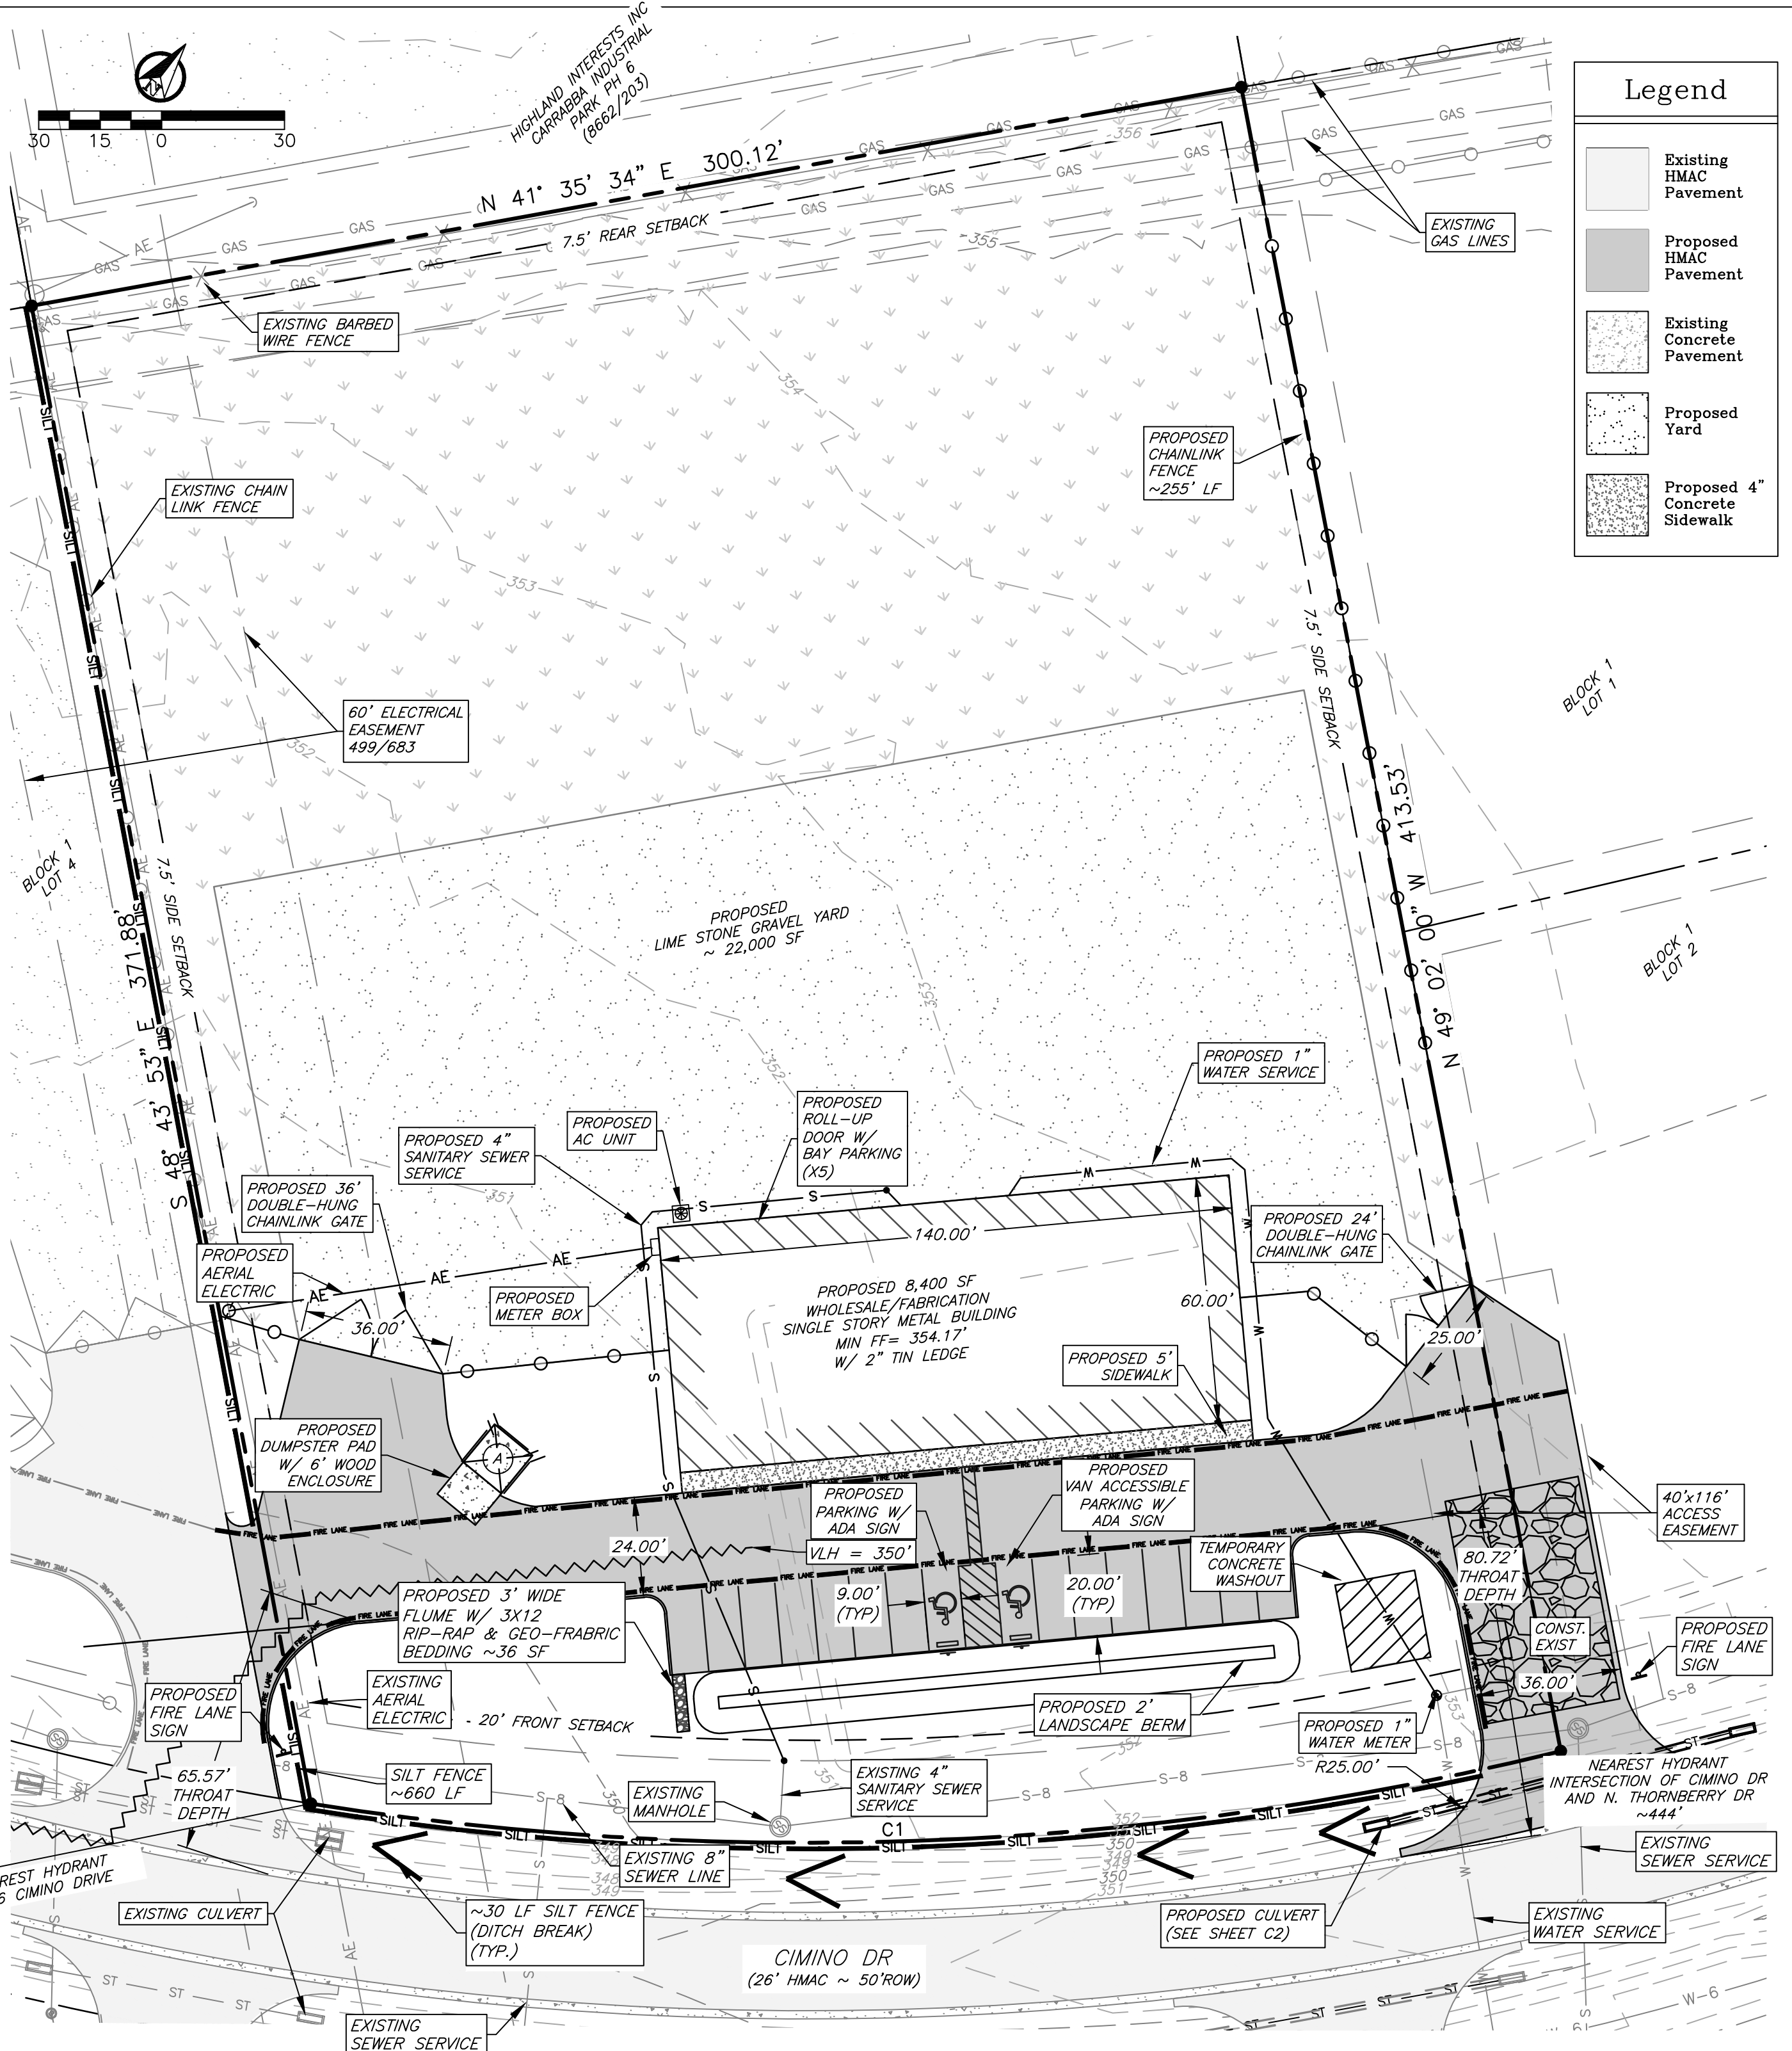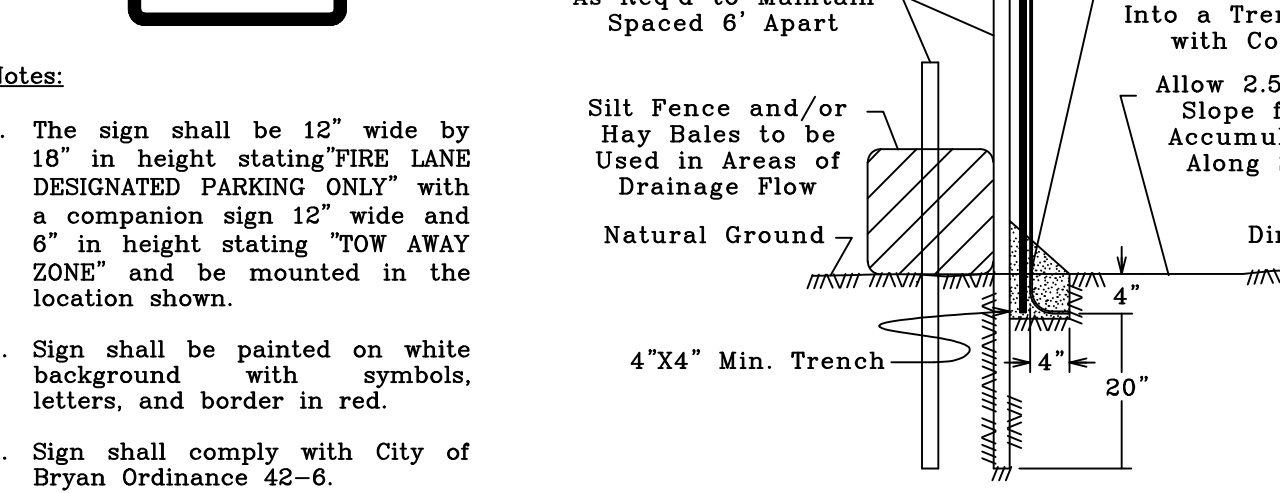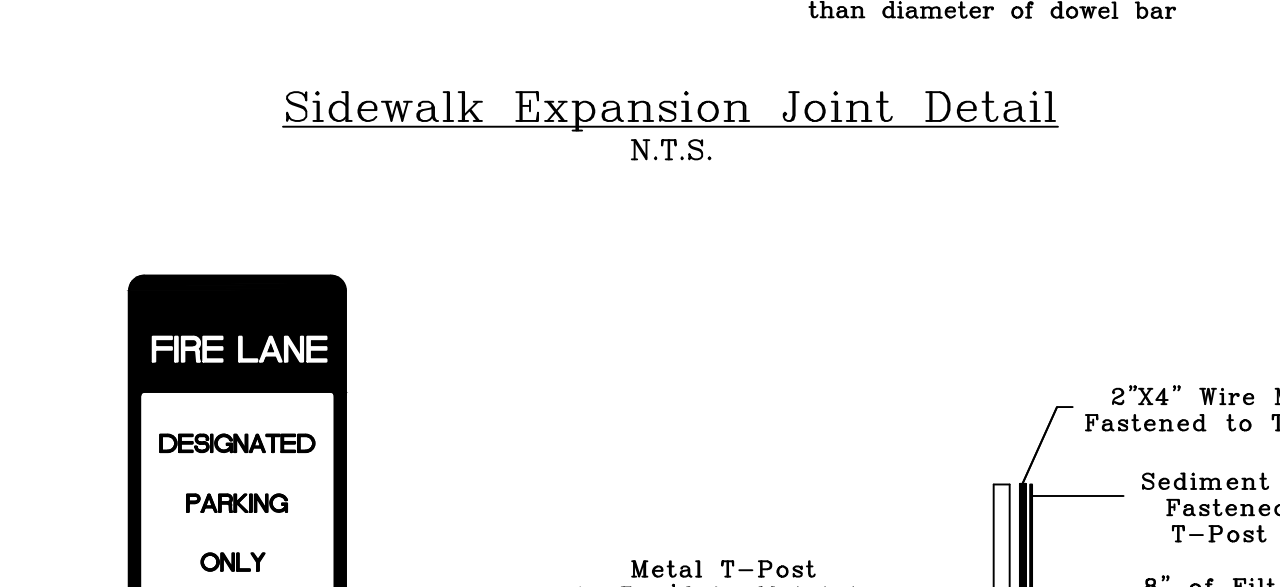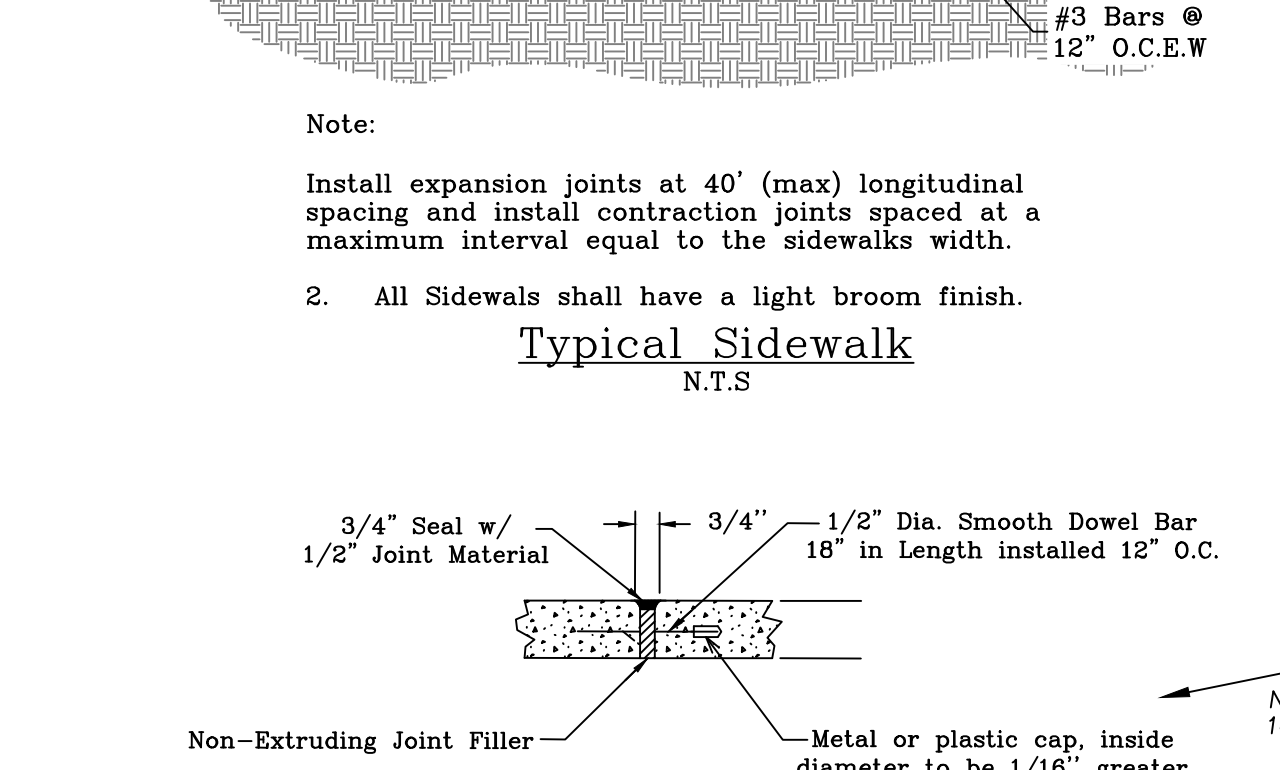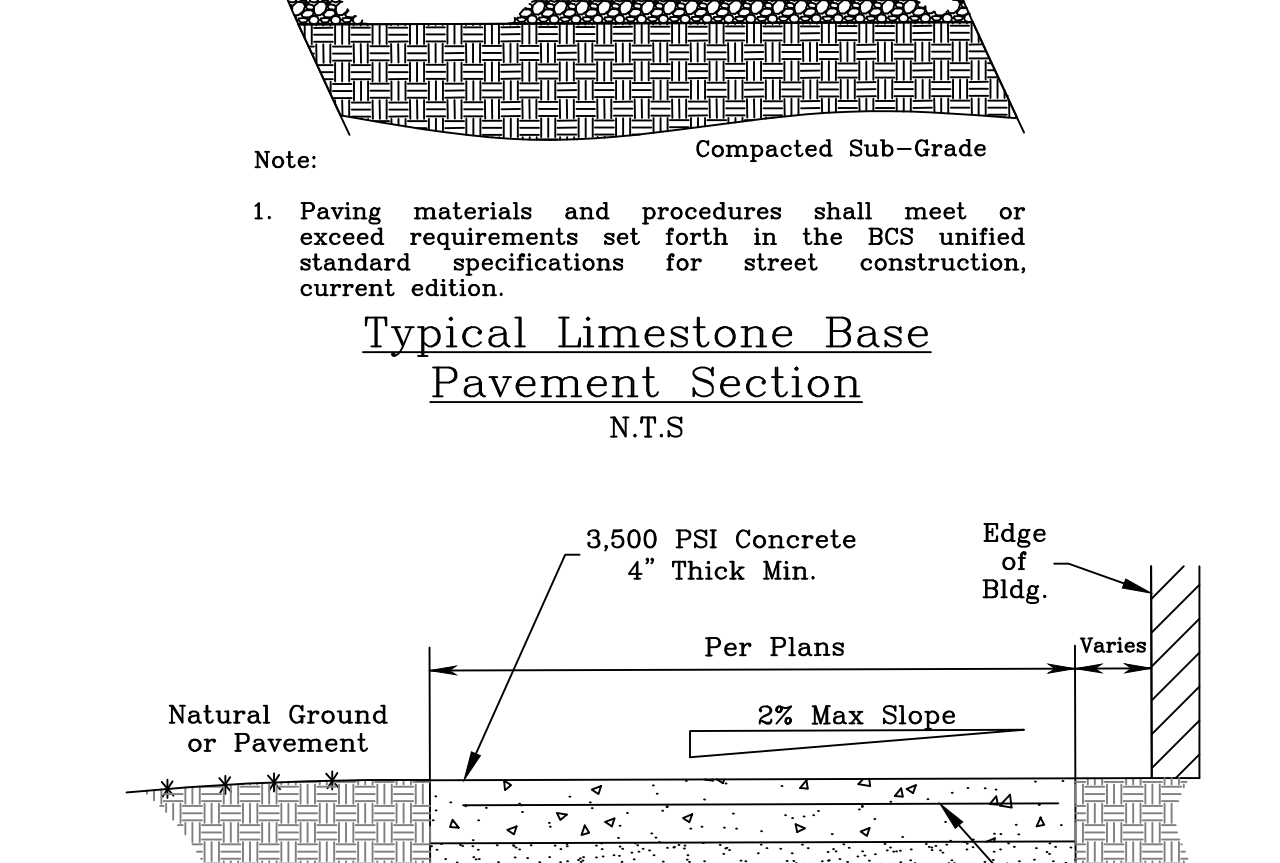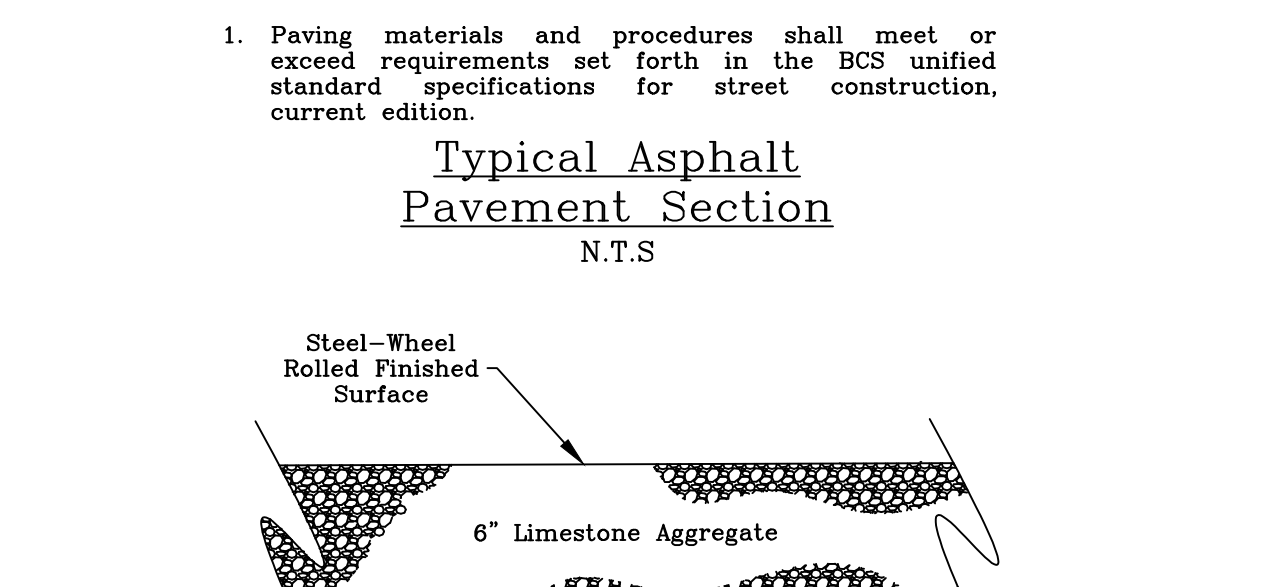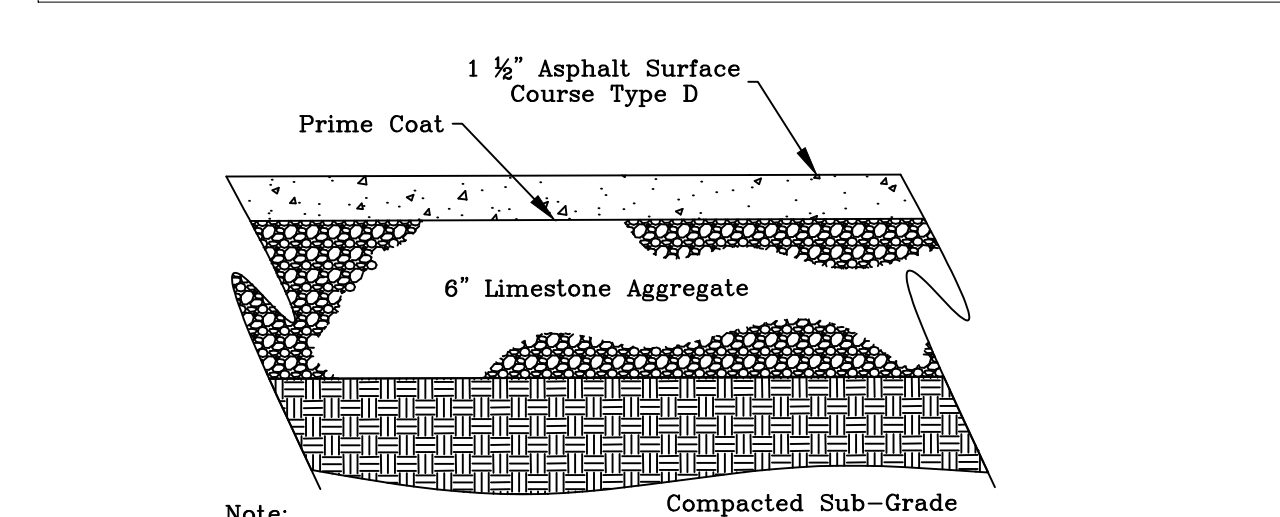

Owner/Developer:  
GRT Interests LLC  
P.O. BOX 663  
Bryan TX, 77808

**Preliminary Plans Only  
Not for Construction**

This document is released for the purpose of interim review under the authority of Glenm Jones, P.E. 97600 on 14-Dec-22. It is not to be used for construction, bidding, or permitting purposes.

Firm Name and Address:  
**J4 Engineering**  
PO Box 5192 - Bryan, Texas - 77805  
979-739-0567 www.J4Engineering.com  
Firm # 9951

Project Name and Address:  
**Site Plan  
1819 Cimino Dr**  
Carrabba Industrial Park Ph 11  
Block 1, Lot 3  
Bryan, Brazos County, Texas

Date: Dec. 2022  
Scale: As Noted  
Sheet: C1

J4E Project # 22-003  
 1819 Cimino Dr - Site Planning  
 12/14/22  
 J4 Engineering



