

Site Plan

General Notes:

The topography shown is from field

2. All utilities shown are taken from the best available information based on construction utility documents obtained by J4 Engineering from City and Independent agencies and/or above ground field evidence. Shown positions may not represent as-built conditions.

3. The contractor shall be responsible for verifying the exact location of all existing underground utilities, whether shown on these plans or not. Notification of the utility companies 48 hours in advance of construction is required.

4. Contractor is responsible for field verifying existing and proposed grades prior to any construction and reporting any inconsistencies to the Owner.

5. Normal Domestic Wastewater is anticipated to be discharged from this

6. All construction shall be in accordance with the current BCS Standard Specifications, Details, and Design Guidelines for Water, Sewer, Streets, and Drainage, unless otherwise

7. It is the intent of these plans to comply with all City of Bryan guidelines, details & specifications.


Owner/Developer:
Rueda Tabor Investments, LLC &
CVS Rueda Ivestments, LLC
1204 Carmel CT
College Station, TX 77845

Surveyor: Kerr Surveying, LLC 1718 Briarcrest Dr. Bryan TX, 77802

Preliminary Plans Only Not for Construction

This document is released for the purpose of interim review under the authority of Glenn Jones, P.E. 97600 on 24-Sep-25. It is not to be used for construction, bidding, or permitting purposes.

Released for Review



Name and Address:



PO Box 5192 - Bryan, Texas - 77805 979-739-0567 www.J4Engineering.com Firm# 9951

Project Name and Address:

3201 Clarks Lane
Lone Oaks Acres
Block 14, Lots 9-12 - 1.594 AC

Bryan, Brazos County, Texas

September 2025	Sheet:
Scale: As Noted	<i>C1</i>
Drawn By:]
CB	

Landscape Notes:


- All disturbed area to be seeded with Bermuda Grass except where Bermuda Grass Sod is called for on the plans.
- Replacement of dead landscaping shall occur within 90 days of notification. Replacement material must be of similar character as the dead landscaping. Failure to replace dead landscaping, as required by the zoning official or his or her designee, shall constitute a violation of this article subject to the general penalty provisions of City Code section 1-14.
- All trees shall be provided as container grown trees.
- All landscaping plant material shall be guaranteed for a period of one year from the date of installation by contractor. After one year, the owner will be responsible for maintenance of all landscaping.
- Plant material shown here is represented at its mature size. Plants to be installed will be significantly smaller than those shown and should not be expected to reach maturity for several years dependant on growing conditions.
- Contractor is to seed all disturbed areas left unpaved and guarantee coverage of vegetation until establishment of grass. Grass type shall be Bermuda grass or Rye/Bermuda mixture.
- Plant material will be watered by hose bibs located at building corners.
- Plantings for parking lot screening (Crepe Myrtles) shall be planted a maximum of 3 feet from the edge of parking lot pavement. No plantings shall be placed directly over existing water/sewer lines.
- To ensure the growth of trees in end islands, a minimum 24-inch soil depth and 250 cubic feet of appropriate planting medium is required per tree, with topsoil mounded to a center height.
- 10. Outdoor storage yards are excluded from the disturbed area landscaping calculations per the PD Ordinance.

Landscape	e Analysi	s:	
Construction Activities:			
Building & Pavement	Net Total=	5,974 S 5,974 S	<u>F</u> F
Requirements:			
Disturbed Area Buildir 5,974 SF @ 15%		896 SF	nt
Provided:			
Canopy Trees 2 @ 200 SF Non-Canopy Trees 6 @ 100 SF	=	400	SF
	=	600	SF
Net	Total=	1,000	SF


	Qty.	Common Name	Botanical Name	Size
\$ 0 5 5 8 5 8 5 8 5 8 5 8 5 8 5 8 5 8 5 8	2	Cedar Elm	Ulmus Crassifolia	1½"−3" ca
	6	Crepe Myrtle	Lagerstroemia indica	1½"−3" ca

Paving Notes:

- The subgrade beneath the concrete sidewalks shall be compacted and "proof-rolled". Any weak or soft areas identified by the "proof-rolling" shall be removed and replaced.
- 2. A sand leveling course under concrete pavement is NOT permitted.
- 3. Joint sealant material to be Sonneborn SL-1 or approved equal.
- Curing compound shall be applied uniformly to the concrete after the surface finishing is complete at the rate recommended by the manufacturer. The curing compound shall meet the requirements of TxDOT Item 526.
- All concrete for pavement construction shall be to the minimum depth shown on the plans and shall have a minimum 28-day compressive strength of 4000 PSI. The maximum percentage of fly ash replacement of portland cement shall be 20 percent by weight.
- 6. Contractor shall provide engineer with a proposed pavement expansion and contraction joint plan prior to pavement construction.

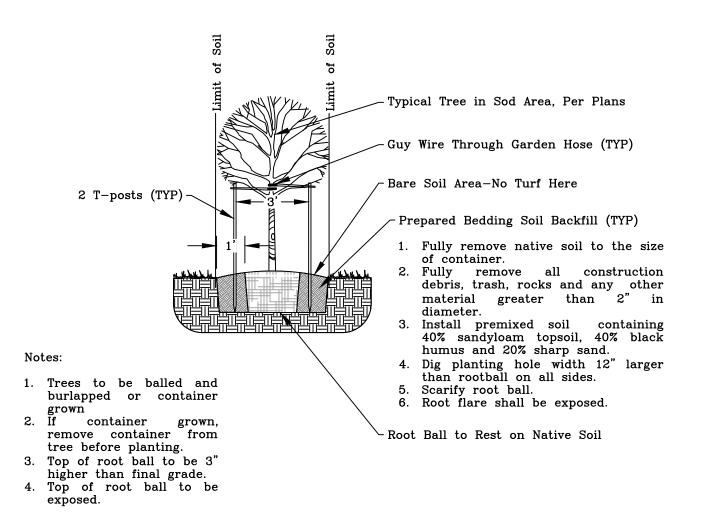




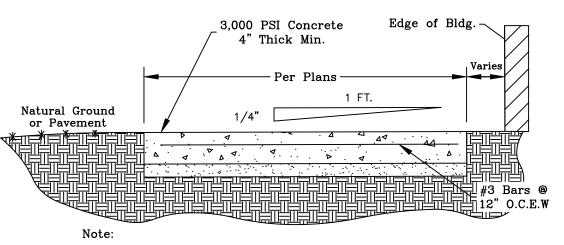


1. Install expansion joints at 40' max. longitudinal spacing and install control joints at 5' longitudinal spacing

Typical Sidewalk N.T.S

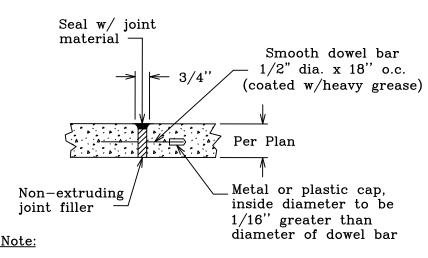


- 1. Expansion joint sealant to be Sonoborn SL-1 or approved equal.
- 2. Expansion joints shall be spaced at 45' maximum

Expansion Joint Detail N.T.S



1. Contraction joints shall be spaced at 15' maximum

Contraction Joint Detail
N.T.S

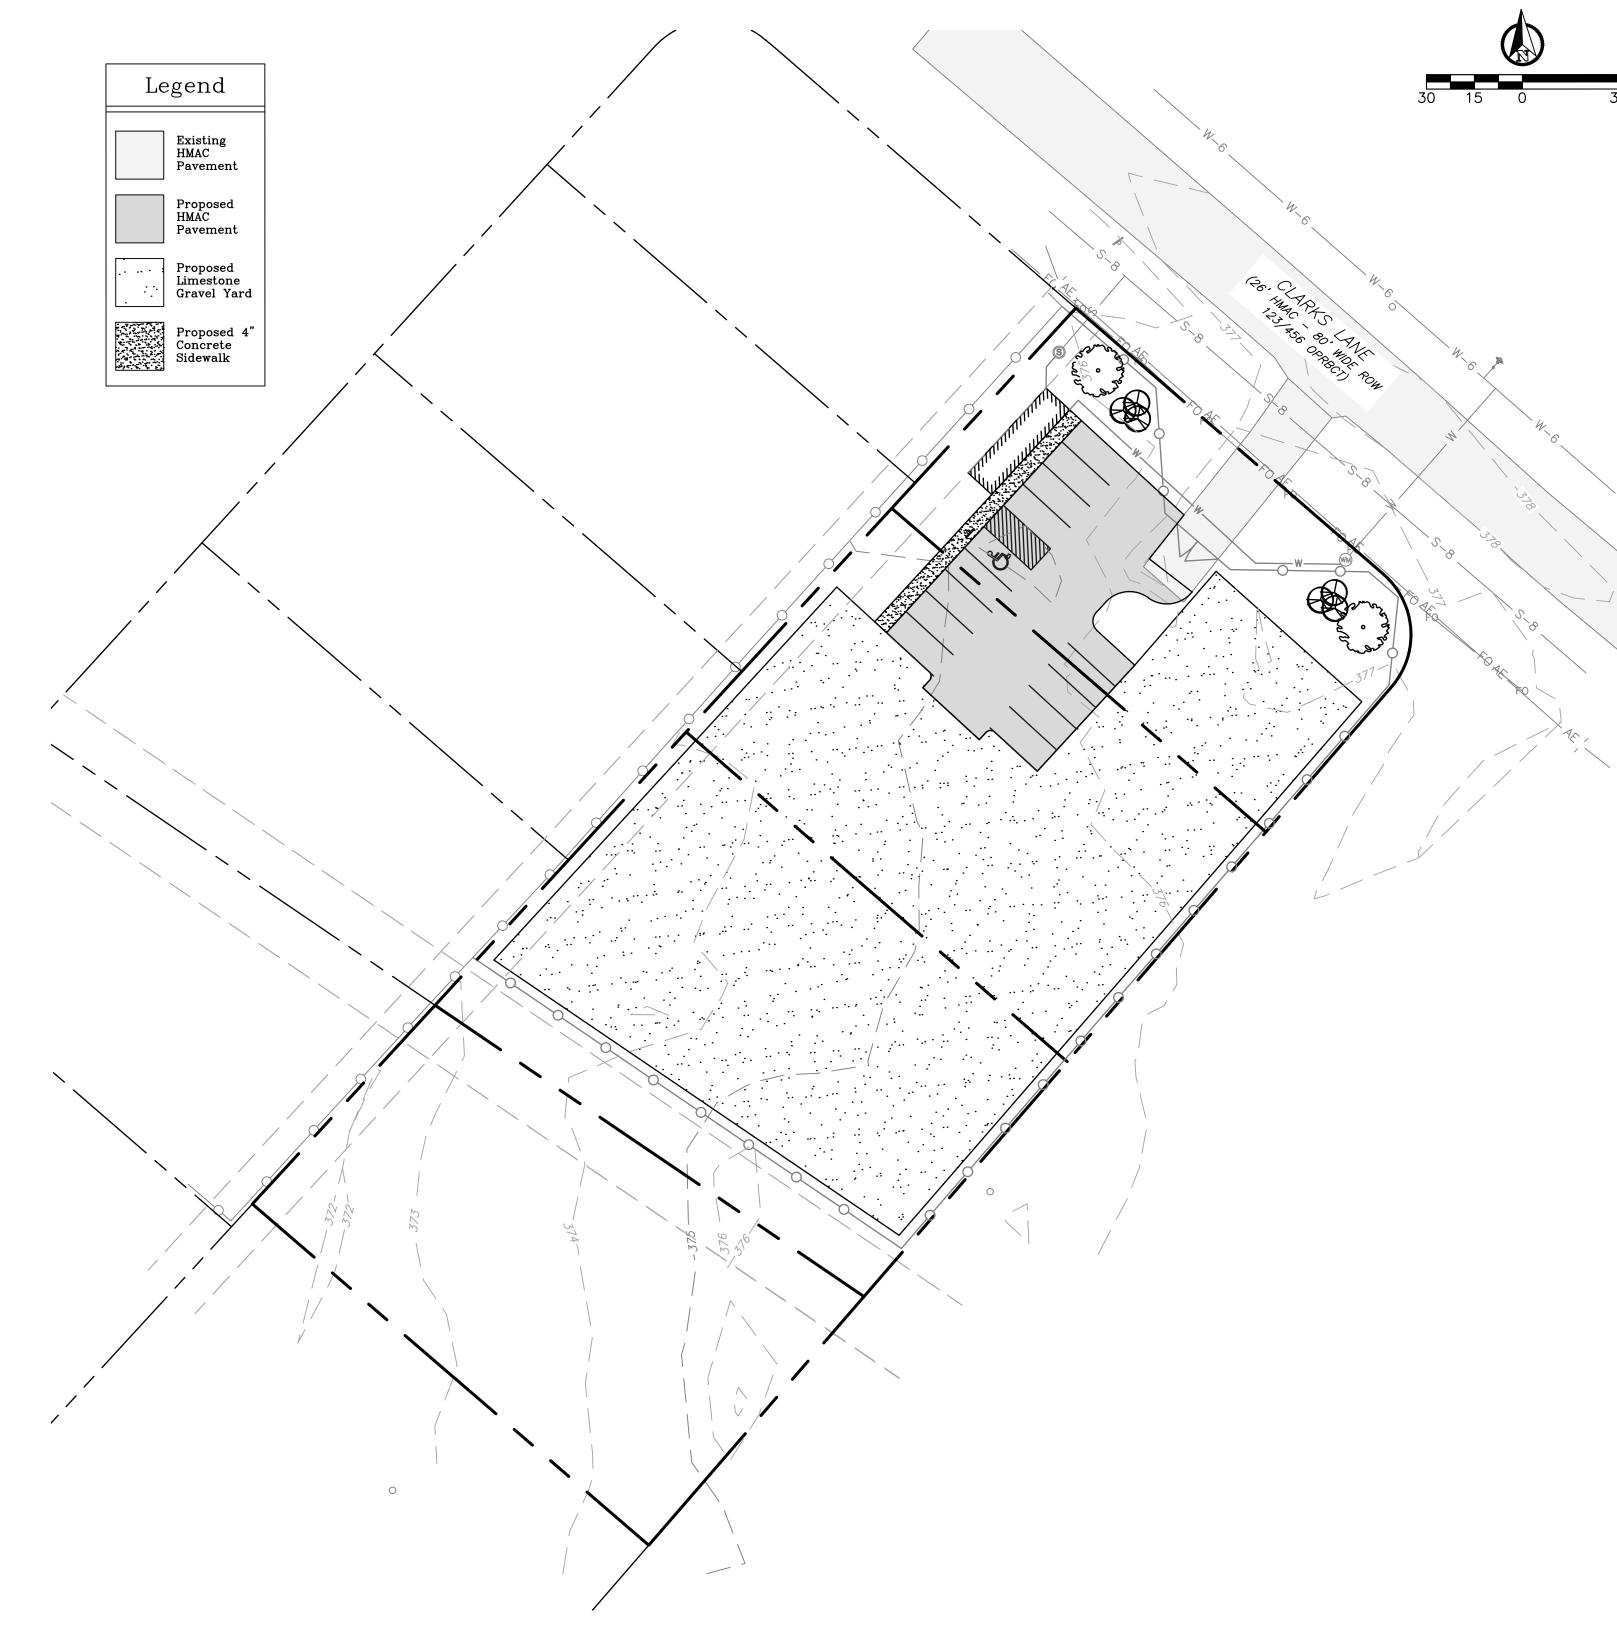

PVMT& Landscape Plan

General Notes:

The topography shown is from field survey data.

All utilities shown are taken from the best available information based on construction utility documents obtained by J4 Engineering from City and Independent agencies and/or above ground field evidence. Shown positions may not represent as-built conditions.

3. The contractor shall be responsible for verifying the exact location of all existing underground utilities, whether shown on these plans or not. Notification of the utility companies 48 hours in advance of construction is required.

Contractor is responsible for field verifying existing and proposed grades prior to any construction and reporting any inconsistencies to the Owner.

Normal Domestic Wastewater is anticipated to be discharged from this


3. All construction shall be in accordance with the current BCS Standard Specifications, Details, and Design Guidelines for Water, Sewer, Streets, and Drainage, unless otherwise

7. It is the intent of these plans to comply with all City of Bryan guidelines, details & specifications.

Preliminary Plans Only Not for Construction

This document is released for the purpose of interim review under the authority of Glenn Jones, P.E. 97600 on 24-Sep-25. It is not to be used for construction, bidding, or permitting purposes.

Released for Review





PO Box 5192 - Bryan, Texas - 77805 979-739-0567 www.J4Engineering.com Firm# 9951

Project Name and Address:

3201 Clarks Lane Lone Oaks Acres

Bryan, Brazos County, Texas

Block 14, Lots 9-12 - 1.594 AC

eptember 2025	Sheet:
As Noted	<i>C2</i>
By:	