

General Notes:

- 1. The contractor shall promptly notify the engineer of any discrepancies between these plans and other drawings of differing disciplines & specifications.
2. The contractor is specifically cautioned that the location and/or elevation of the existing utilities as shown on these plans is based on records of the various utility companies and, where possible, measurements taken in the field.
3. Contractor to verify all underground utilities in the field prior to construction.
4. It is the responsibility of the contractor to comply with all state and federal regulations regarding construction activities near energized over head power lines.
5. The contractor shall be responsible for the protection of all existing utilities or service lines that are crossed or exposed during construction operations.
6. During the execution of the work, the contractor shall maintain the project site in an orderly and acceptable manner as far as practical.
7. Contractor is responsible for OSHA established trench safety as described in the federal register 29 CFR Part 1926.
8. A copy of the approved construction plans shall be kept on site at all times throughout the entire construction of the project.
9. The contractor shall be responsible for safeguarding and protections all materials and equipment stored on the jobsite.
10. Contractor to store materials at location(s) approved by & coordinated with the owner.
11. Contractor shall saw cut remove and replace concrete pavement, and curb & gutter as required to construct proposed improvements.
12. It shall be the responsibility of the contractor to pay for and obtain all required permits and inspection approvals for all work shown.
13. Any adjacent property and right-of-way disturbed during construction will be returned to their existing condition or better.
14. All exposed dirt surfaces shall be seeded, hydro-mulched, or sodded.
15. The contractor shall not create a dirt nuisance or safety hazard in any street or driveway.
16. Adequate drainage shall be maintained at all times during construction and any drainage ditch or structure disturbed during construction shall be restored to existing conditions or better.
17. The contractor shall coordinate all fence removal and replacement with the Owner.
18. The contractor shall protect all monuments, iron pins, and property corners during construction.
19. The contractor must provide construction staking from the information provided on the plans.

General Utility Note (Private & Public):

- 1. All excavation for underground utilities shall be made true to grade. Excavation shall be made a minimum of six inches below the required grade and provide a sand bed for the piping. Backfill over piping shall be made with earth or fill sand, free of debris, and shall be tamped by hand or mechanical means to the density of the adjacent undisturbed earth or to 95% standard proctor density (ASTM D698), which ever is greater.
2. Minimum bury or cover specified is to be measured from finish grades. Where utility line extend under pavement, the bury or cover shall be measured from the bottom of the structure.
3. Utility installations in non-structural areas shall be bedded and initial backfill consistent with non-structural requirements.
4. Regardless of elevations shown for manhole rims, clean-out covers, or grates, these items shall be placed flush with the pavement elevations and slopes.
5. Contractor shall uncover existing utilities at all "points of interest" to determine if conflicts exist before commencing and construction.
6. The contractor shall coordinate all utility installation so that grade critical elements (i.e. storm drain, sanitary sewer, etc.) do not conflict with non-grade critical elements (i.e. electrical conduit, water services, etc.).
7. The contractor shall furnish all materials, equipment, and labor for excavation, boring, installation, and backfilling of utility lines and relates appurtenances, as shown on the plans.
8. The loading and unloading of all pipe and other accessories shall be in accordance with the manufacturer's recommended practices and shall, at all times, be performed with care to avoid any damage to the material.
9. Contractor shall be responsible for coordinating all connections to public systems and installations with regulatory inspector.
10. This project shall be built by means of open cut except as noted on the drawings.
11. Structural backfill will be required for all excavation within 5 feet of public roadway pavements or walks.

Private Utility Notes:

- 1. The contractor shall install the proposed private utility lines in accordance with local codes, latest national plumbing code, and all applicable state and local laws.
2. It shall be the responsibility of the contractor to pay for and obtain all required permits and inspection approvals for all work shown.
3. The contractor shall coordinate all installations of service lines, conduits, meters, etc., with the appropriate utility company.

Water Line Notes (Public & Private):

- 1. All domestic water line pipe shall be constructed out of PVC (Sch 40). Public or fire water line pipe shall be constructed out of C900-DR14 and public services shall be copper.

Storm Sewer Notes (Private):

- 1. All 15 inch to 42 inch storm sewer pipe, shall be constructed out of reinforced concrete pipe (RCP), C443 ASTM C76, Class III except as noted.
2. All 6 inch to 12 inch storm sewer pipe, except as noted, shall be HDPE. SDR-35, ASTM D-5034, PVC pipe may be used in place of HDPE pipe.
3. Contractor shall provide a minimum of 12 inch clearance at storm sewer and water line crossings and a minimum of 6 inch clearance at storm sewer and sanitary sewer crossings.
4. Unless otherwise specified, the contractor shall install all storm sewer pipe in accordance with the trench detail contained in these construction drawings.

Demolition & Construction Notes:

- 1. Demolition of existing structures and improvements shall include all work contained on these plans, but shall not be limited to the items specially identified.
2. It shall be the responsibility of the contractor to stage and sequence all demolition work with utility companies to provide minimal interruption and inconvenience of utility services.
3. Demolished surplus material shall be legally disposed of off-site.
4. All pavement edges, bounding the construction area & matching with new construction, shall be neatly sw cut, unless gravel.
5. The contractor shall clear all right-of-ways and easements contained in these construction drawings.
6. The contractor shall field verify and locate all existing utilities on site prior to demolition.
7. The contractor shall perform demolition activities as noted and shown on these plans and as directed by the owner/ developer.
8. It shall be the responsibility of the contractor to obtain any permits and pay any fees required for demolition and disposal from the appropriate authorities.
9. The contractor shall install all erosion and sediment control devices prior to commencing demolition work.
10. The contractor is responsible for the protection of all utilities that are to remain in place.
11. The contractor shall take all precautions to avoid damage to any existing road surface.
12. All existing items that are to remain in place which are damaged during construction shall be restored to original condition, or better, at the sole expense of the contractor.
13. Should any existing utilities not shown or shown incorrectly on this plan be found on site, the contractor shall contact the engineer immediately to discuss any possible conflicts before proceeding with any work in that area.
14. An asbestos survey must be performed prior to the demolishing of any structures. The contractor shall adhere to the requirements set forth in the asbestos survey and report.

Dimensional Control Notes:

- 1. The contractor may obtain an electronic copy of these plans for construction purposes. The electronic file and information generated, by J4 Engineering (J4E), for this project is considered by j4e to be confidential.
2. All dimensions shown are to be used in conjunction with these plans for locating all improvements and shall be field verified by the contractor for workability prior to construction of improvements.
3. Unless otherwise shown, all dimensioning is to the back of curb or edge of pavement, which ever is applicable.

Grading Notes:

- 1. All unpaved areas shall be adequately graded to drain at a minimum of 1.00% slope, unless otherwise noted, so that no ponding occurs.
2. Unless otherwise specified, unpaved areas shall drain away from buildings so that the perimeter curb is a minimum 6" lower than the finished floor.
3. Finish grade adjacent to curbing or sidewalk shall be 1/2" below the top of concrete and 2" below in landscaping areas.
4. When top of curb elevations are shown, the curb height is 6" unless otherwise specified.
5. The contractor shall follow the general intent of the grading plans.
6. Adequate drainage shall be maintained at all times during construction and any drainage ditch or structure disturbed during construction shall be restored to existing conditions or better.
7. The approval of these plans is not an authorization to grade adjacent properties.

Erosion Control Notes:

- 1. Erosion control measures shown in these plans shall be considered the very minimum required.
2. The site operator, or his representative established by a letter of delegation, shall make a visual inspection of all siltation controls and newly stabilized areas on a daily basis.
3. All sediment trapping devices shall be installed as soon as practical after the area has been disturbed.
4. During construction, contractor shall maintain best management practice (bmp). Sediment fence, hay bale barriers, or other devices shall control all storm water leaving the site.

- 5. The contractor shall be responsible for establishing temporary erosion control measures as required for different phases of construction.
6. Phase II erosion control measure measures shall be implemented immediately after construction of their associated improvements.
7. The contractor is responsible for removing sediment control devices after the site has been seeded and/ or sodded, and ground cover has taken root.
9. The contractor shall take all necessary measures to ensure that all disturbed areas are stabilized.
10. When hydro-mulching is required, contractor shall keep mulch moist after installation and until area shows growth.
11. Erosion control measures shall be implemented prior to any excavation or demolition work.

Sidewalk Construction

- 1. Sidewalks shall be doweled into and tie to any concrete structure adjacent to sidewalk (driveway, inlet box, curb) #4 x 12" bars @ 18" O.C.
2. ADA ramps shall be constructed per the ambulatory ramp details on the pavement plan shown in these plans.

Paving Notes:

- 1. The pavement system shown was designed without the aid of a geotechnical investigation.
2. Sub-grade
a. Existing trees, stumps, and large tree systems, shall be grubbed and removed.
b. Paving areas shall be proof-rolled with a 20 ton roller and, if required at the time of construction, the contractor shall stabilize weak areas by over excavation and backfilling.
c. Materials excavated on site, excluding the top 6 inches, may be used as fill material, under pavement areas only.
d. Fill material shall be placed in eight inch maximum loose lifts, with each lift wetted or dined to a moisture content range of 0% to +3% of the optimum moisture content and compacted to a uniform density of 95% of the maximum dry density as determined by ASTM D698.
e. Compaction test, for fill, shall be verified by in-place density test for each lift.
3. Asphalt
a. All asphalt paving shall be hot-mix asphalt cement (HMAC), Type D P64-22, in accordance with TxDOT Item #340.
b. No more than 20% RAP shall be used with HMAC mix design.
c. Limestone base shall be prime coating with RC-250, MC-30, CRS-1P/2P, or approved equal in accordance with TxDOT Item #300 and Item #310.

Portland Cement Concrete

- a. All concrete, unless otherwise specified, shall have a minimum compressive strength of 3,500 psi at 28 days for pavement and 3,000 psi at 28days for non-pavement applications.
b. All concrete shall be vibrated when placed and not raked a distance greater than 10 feet.
c. Unless otherwise noted, joint spacing shall not exceed 15 feet in any direction to another joint or edge of pavement.
d. Expansion joints shall not exceed a maximum spacing of 45 feet and should not be placed through the middle of area inlets or junction boxes located in the pavement.
e. All joints shall be sealed with Sonoborn Sonolastic SL-1, or an approved equal.
f. Concrete shall not be placed if the air temperature is 50° F and falling or 95° F or higher.
4. Steel
a. All reinforcing steel shall be deformed billed steel bar having a minimum yield strength of not less than 60 KSI conforming to ASTM A615, Grade 60.
b. All reinforcing steel shall be free from rust or other bond reducing agents.
c. All splices in pavement and curbing steel shall be staggered and lapped 30 inches times the bar diameter or 12 inches, whichever is greater.
d. Concrete coverage for the reinforcing steel shall comply with the ACI code, latest edition.

Gas Company Notes:

- 1. At all underground gas utility crossings, the contractor shall give the appropriate utility company a minimum of 72 hours notice so that their field representative may be present.
2. Eighteen (18) inch clearance shall be maintained between the proposed utility and the existing underground gas line.
3. For excavation near the underground gas line(s), the contractor shall cover, or remove, the bucket teeth of the excavator.

Traffic Control Notes:

- 1. Contractor shall provide and install traffic control devices in conformance with part VI of the Texas Manual on Uniform Traffic Control Devices (Texas MUTCD, most recent edition with revisions) during construction.
2. Lane closure will not be allowed unless approved by the TxDOT or COB representative, as applicable.
3. The work shall be completed such that the roadway will be fully opened to traffic overnight.
4. Plastic drums shall be used for overnight delineation of off roadway work areas.

Legend section containing Line Types (Existing Water Line, Proposed Water Line, Existing Water Service, etc.), Symbols (Hydrant, Water Valve, Water Manhole, etc.), and Abbreviations (TP Top of Pavement, TC Top of Curb, etc.).



making a difference by Design
www.pattersonarchitects.net
701 South Texas Avenue
Bryan, Texas 77803
979-774-8896
design@patach.com

CFI Companies Consulting Engineers logo and contact information: Houston, Texas 77042, 2500 Wilcrest Drive, Suite 150, Tel: (817) 808-7532, Fax: (817) 808-7536, CFI Project No.: 117183.00, www.cficompanies.com

GESSNER ENGINEERING logo and contact information: CIVIL, GEMT | GEOTECHNICAL | STRUCTURAL | SURVEYING, CORPORATE OFFICE: 409 WEST 20TH STREET, BRYAN, TEXAS 77803, Tel: (817) 781-1111, Fax: (817) 781-1112, www.gessnerengineering.com



Preliminary Plans Only Not for Construction


This document is released for the purpose of interim review under the authority of Glenn Jones, P.E. (9700) on 05/24/2025. It is not to be used for construction, bidding, or permitting purposes.

Released for Review

NEW PROVIDENCE CHURCH 5.137 Acres 2610 AUSTINS COLONY PARKWAY BRYAN, TEXAS

No. Date: Issue Notes:
Drawn By:
Checked By:
Patterson Project No.: 2505
Building Inventory No.:
Plot Date:
CAD File:
Project No.:
Sheet Title

NOTES
Sheet No. C1 of

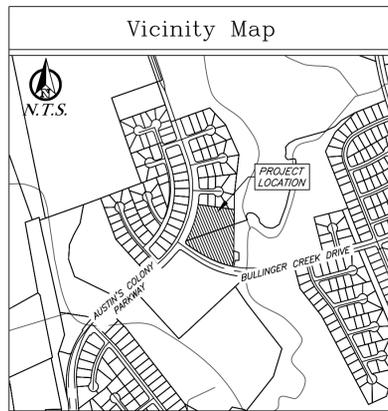

Construction Notes:

- All concrete to be constructed with 3,500 psi (Min) - 28 day strength portland cement concrete.
- All items to be removed during clearing and grubbing. Remove not only the above ground elements, but all underground elements as well. All excavated material shall become the property of the contractor unless otherwise directed by the Owner. All debris must be disposed of off site.
- Prior to grading operations, contractor is to strip the first 6" of soil. Contractor shall proof roll the entire site and remove any unstable materials according to TxDOT Specifications. Select fill is to be used in replacing objectionable material.
- Assure positive drainage across project site to the storm water structures.
- Normal Domestic Wastewater is anticipated to be discharged from this development.
- Potable Water Protection - All devices, appurtenances, appliances, and apparatus intended to serve some special function and that connects to the water supply system, shall be provided with protection against backflow and contamination of the water supply system. As noted in Texas Administrative Code 30 TAC 290.47 - Appendix F.
- Irrigation System - Potable water supply must be protected by either an atmospheric or pressure vacuum breaker, or testable double check valve assembly, and installed per City Ordinance.
- Each utility contractor is responsible for positioning and trenching of service lines. Mark all lines with utility tape. Utility contractors are responsible for coordinating with paving contractor in placement and installation of any necessary utility conduit prior to subgrade preparation. Lines requiring slope control are to be installed first. All other lines not requiring slope control or elevation shall be installed deepest first. Each contractor is responsible for knowing final determination of installation order.
- Materials and methods for pavement markings shall conform to TxDOT Standard Specifications for Construction of Highways, Streets, and Bridges (current edition), with the following exceptions: 1) Type II marking materials need not be purchased from the Department, and 2) Glass beads may be omitted, but marking material shall be Type II paint-type material.
- The Contractor shall be responsible for the containment and proper disposal of all liquid and solid waste associated with this project. The Contractor shall use all means necessary to prevent the occurrence of windblown litter from the project site.
- Demolition/Construction Waste - Site is required to provide containment for waste prior to and during demolition/construction. Solid waste roll off boxes and/or metal dumpsters shall be supplied by City to permitted contractor(s) only.
- Contractor is responsible for field verifying existing and proposed grades prior to any construction and reporting any inconsistencies to the Owner.

Solid Waste Notes:

- Before enclosure construction/modification begins contact Solid Waste, at (979)209-5900 for an on-site review.
- If any changes are made to the enclosure plan during the construction phase please contact Solid Waste to review modifications.
- Dumpster containment areas shall use 6" concrete, reinforced with #5 bars at 12" OCEW and the pad shall extend an additional 10' in front of the containment area.
- The dumpster containment area shall be surrounded on three sides with a screen constructed to a height of six feet.
- An all-weather access route (i.e. parking lots, loading docks, private roads, alleys, etc.) capable of supporting the container and the collection truck must be constructed and will be maintained and repaired at the business owner's expense.
- The pad, screening and doors will be constructed and maintained at the property owner's expense

NOTICE!

The contractor is specifically cautioned that the location and/or elevation of the existing utilities as shown on these plans is based on records of the various utility companies and, where possible, measurements taken in the field. The information is not to be relied upon as being exact or complete. It is the contractor's responsibility to avoid all existing utilities and repair any damaged lines, at his own expense, whether the utility is shown on these plans or not. The contractor shall notify the appropriate utility company 48 hours prior to any excavation.

Contact Information:

Texas One Call: 800-245-4545
 Lone Star One Call: 800-869-8344
 Texas Excavation Safety: 800-344-8377
 City of Bryan: 979-209-5900
 System (Digitess): 979-821-5865
 Bryan Texas Utilities: 979-774-2506
 Atmos Energy: 979-821-4300
 Frontier: 979-846-2229
 Suddenlink

Site Specific Notes:


- The owner of the property is Providence Church, 501 Industrial Blvd, Bryan, Texas 77802. The subject property is Providence Church, Block 1, Lot 1, Bryan, Brazos County, Texas.
- The proposed single story building are Type IIIb 10,473 SF without sprinklers, FF=305.13' and Height=29'-6".
- The subject property is zoned Agricultural-Open District (A-O).
- All signage to be permitted separately.
- Planned use of the site is an Assembly (A-3) occupancy - Church.
- Fire flow demand is 2,250 gpm, based on the largest building, and can be split between the existing hydrant adjacent to the property and a proposed hydrant onsite which will provide the fire flow for this project.
- A portion of this tract does lie within a designated 100-yr floodplain according to the FIRM Map, Panel No. 48041C0215F, Revised Date, April 2, 2014. The minimum finished floor elevation for Lot 1 shall be 305.13', which is 1' above the base flood elevation.
- All minimum building setbacks shall be in accordance with City of Bryan Ordinances.
- Owner shall be responsible for the operation, repair, and maintenance of the private stormwater infrastructure facilities.

Utility Notes:


- Private water line and private sanitary sewer line construction shall be in accordance with the plumbing code. Cleanouts shall be installed per plumbing code.
- Private water and sewer line service materials to be in accordance with plumbing code.
- Contractor shall coordinate conduit and/or line installation for telecommunication providers for the site.
- Depth of the existing water and sewer lines to be verified by the contractor.
- Where electric facilities are installed, BTU has the right to install, operate, relocate, construct, reconstruct, add to, maintain, inspect, patrol, enlarge, repair, remove, and replace said facilities upon, over, under, and across the property included in the PUE, and the right of ingress and egress on the property adjacent to the PUE to access electric facilities.

Fire Lane Striping:

- All curbs and curb ends shall be painted red with 4" white lettering stating "FIRE LANE-NO PARKING-TOW AWAY ZONE". The phrases should be spaced 15' apart continuously. Fire Lane linework shown on this Site Plan is used to delineate the location of the fire lane for permitting purposes and is not intended to show required painted Fire Lane Striping.
- Legend: ■ FIRE LANE ■ NO PARKING ■ TOW AWAY ZONE
- Note: Fire lane shall not be painted on Flat work/surface with use of Fire Lane Signage.

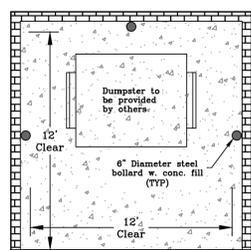

Typical Dumpster Enclosure - Plan
N.T.S.

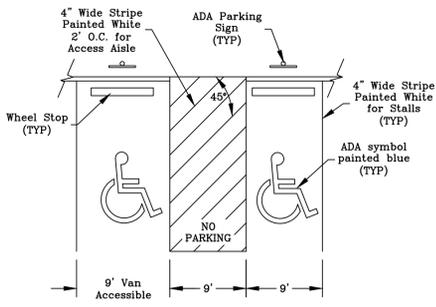

ADA Pavement Markings
N.T.S.

Parking Analysis:

Proposed Improvements:

1 - 10,171 SF Church w/ 208 seats

New Required Parking:

70.1 Space per 3 seats


70... Total Required

Total Proposed Parking:


72... Straight in Parking

3... ADA Parking

75... Total Provided

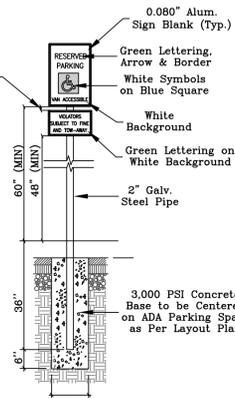


ADA Parking Sign
N.T.S.

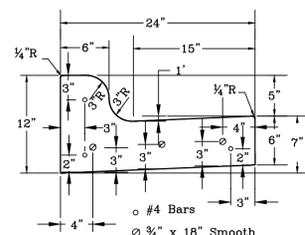


Driveway Raised Curb Detail
N.T.S.




Fire Lane Sign Detail
N.T.S.

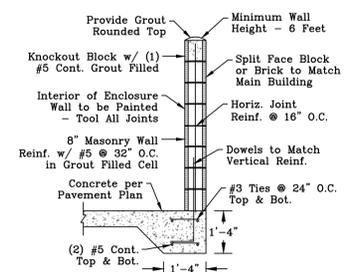

Dumpster Enclosure - Section
N.T.S.

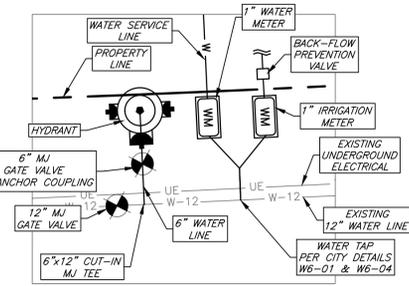

Inset A
N.T.S.

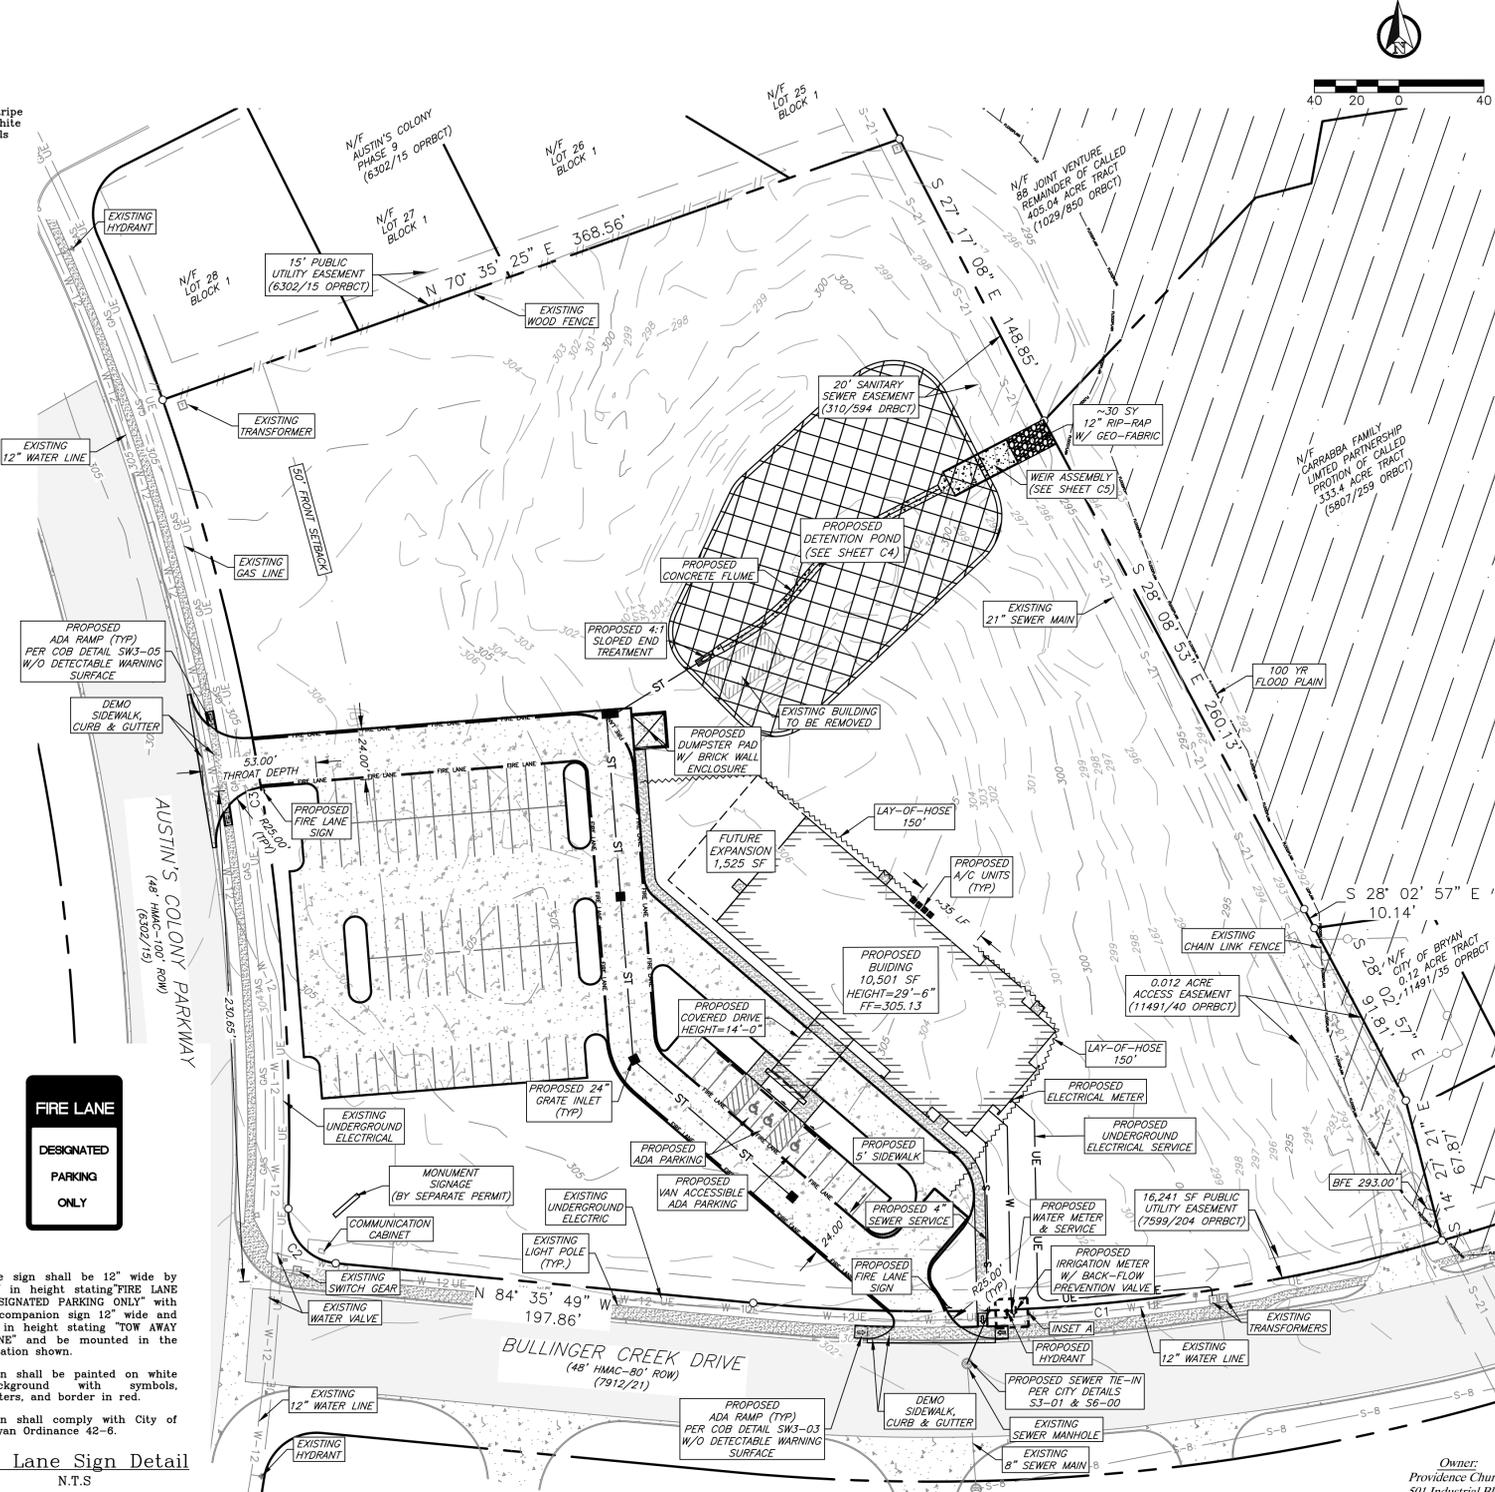

CURVE TABLE

CURVE #	LENGTH	RADIUS	DELTA	CHORD DIRECTION	CHORD LENGTH	TANGENT
C1	328.00'	890.00'	21° 06' 58"	S 84° 50' 42" W	326.15'	165.88'
C2	37.44'	25.00'	85° 47' 49"	N 41° 05' 29" W	34.04'	23.23'
C3	386.66'	1049.99'	21° 05' 56"	N 8° 52' 01" W	384.48'	195.54'

Owner:
Providence Church
501 Industrial Blvd.
Bryan, TX 77803

Surveyor:
Kerr Surveying, LLC
1718 Briarcrest Drive
Bryan, TX 77802
979-268-3195
TBPLS #1W18300
Project #25-1052

PATTERSON ARCHITECTS
making a difference by Design
www.pattersonarchitects.net
701 South Texas Avenue
Bryan, Texas 77803
979-775-6866
design@patach.com

CFI Companies
Consulting Engineers
Houston, Texas 77042
2500 Wilcrest Drive, Suite 150
Tel: (281) 808-1532
Texas Reg. No.: F-12302
www.cficompanies.com

GESSNER ENGINEERING
CIVIL, CMTI | GEOTECHNICAL | STRUCTURAL | SURVEYING
CORPORATE OFFICE:
409 WEST 20TH STREET
BRYAN, TEXAS 77803
3877 GESSNER (437.7637)
www.gessnerengineering.com
FIRM REGISTRATION NUMBERS:
TBPE F-7451, TBPLS F-0293940

J4 Engineering

Preliminary Plans Only
Not for Construction

This document is released for the purpose of interim review under the authority of Glenn Jones, P.E. (979) 209-2546. It is not to be used for construction, bidding, or permitting purposes.

Released for Review

NEW PROVIDENCE CHURCH
5.137 Acres
2610 AUSTIN COLONY PARKWAY
BRYAN, TEXAS


No. Date: Issue Notes:

Drawn By:
Checked By:
Patterson Project No.: 2505
Building Inventory No.:
Plot Date:
CAD File:
Project No.:
Sheet Title

SITE PLAN
Sheet No. C2 of

J4 Engineering 2/25/2026 J4E Project # 25-024 \\s-e-server\2025\25-024 Providence Church\Site Plan\Providence Church - Site Plan.dwg

TREE PROTECTION FENCE SHALL BE MINIMUM 4' HIGH W/ STL. POSTS @ 6'-0" O.C. WELL BRACED W/ SAFETY FENCE WIRE/PLASTIC ON THE POSTS. INSTALL THE FENCE 5'-0" EAST THE DRIP LINE OF THE TREE WHEN POSSIBLE, OR AS DIRECTED BY THE ARCHITECT, TO AFFORD MAX. PROTECTION TO THE TREE. REMOVE FENCE AT COMPLETION OF WORK. UNDER NO CONDITIONS WILL THE CONTRACTOR BE PERMITTED TO TRIM A TREE, IF TRIMMING IS NEEDED, CONTACT THE OWNER.

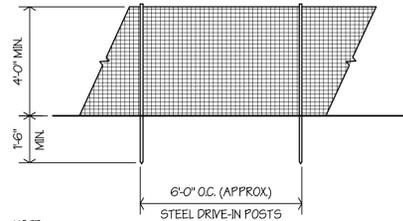

NOTE: ALL POSTS NOT TO BE MOVED DURING CONSTRUCTION. SET A MIN. OF 1'-6" IN GROUND WITH CORNERS ADEQUATELY BRACED.

TREE PROTECTION NOTES:

- EXISTING TREES SHOWN TO REMAIN ARE TO BE PROTECTED DURING CONSTRUCTION. CHAINLINK FENCING (MIN 4'-0" HT.) SHALL BE INSTALLED AT THE DRIP LINE OF ALL TREES OR TREE GROUPING TO REMAIN. PARKING OF VEHICLES OR PERFORMING WORK WITHIN THESE AREAS OTHER THAN SHOWN ON THE PLAN WILL NOT BE ALLOWED. THE TREE PROTECTION SHALL REMAIN DURING CONSTRUCTION. OTHER TREE PROTECTION MEASURES SHALL BE IN ACCORDANCE WITH THE CITY'S ORDINANCES.
- DISPOSAL OF ANY WASTE MATERIAL SUCH AS, BUT NOT LIMITED TO PAINT, ASPHALT, OIL, SOLVENTS, CONCRETE MORTAR, ETC. WITHIN THE CANOPY AREA OF THE EXISTING TREES SHALL NOT BE ALLOWED.
- NO ATTACHMENTS OR WIRES OF ANY KIND, OTHER THAN THOSE OF A PROTECTIVE NATURE SHALL BE ATTACHED TO ANY TREE.
- NO FILL OR EXCAVATION OF ANY NATURE SHALL OCCUR WITHIN THE DRIP LINE OF A TREE TO BE PRESERVED, UNLESS THERE IS A SPECIFIED WELL OR RETAINING WALL SHOWN ON THE GRADING PLAN.
- NO MATERIALS SHALL BE STORED WITHIN THE DRIP LINE AREA OF A TREE TO BE PRESERVED.


SYMBOL	SIZE	OFFICAL NAME	#	SF VALUE	TOTAL
	EXISTING 4.5-14" CALIPER	ELM, OAK	20	400	8,000
	NEW 1.5-3.0" CALIPER	LIVE OAK QUERCUS VIRGINIANA CANOPY TREE	12	200	2,400
	NEW 2-15 GALLONS	YAUPOH HOLLY DRAFF LLEX VOMITORIA SHRUB	54	10	540
	EXISTING TO BE REMOVED	VARIES	-	-	-
	-	BERMUDA CYNODON DACTYLON SOD	-	-	-
	-	HYDRO SEED	-	-	-
TOTAL AREA PROVIDED				10,940 SF	

LANDSCAPE REQUIREMENTS:

- 15% OF DEVELOPED AREA 123 ACRES (53,344 SQ. FT.) = 8,004 SF LANDSCAPING
- NOT LESS THAN 50% OF REQUIRED AREA SHALL BE TREES - 4,002 SF REQ'D; 10,400 PROVIDED
- NOT LESS THAN 50% OF TREES PLANTED SHALL BE CANOPY; 2,201 SF REQ'D; 2,400 PROVIDED
- ALL PARKING ISLANDS MUST HAVE A CANOPY TREE.


TOTAL AREA REQUIRED: 8,004 SF
LANDSCAPED AREA PROVIDED: 10,940 SF

TREE PROTECTION DETAIL

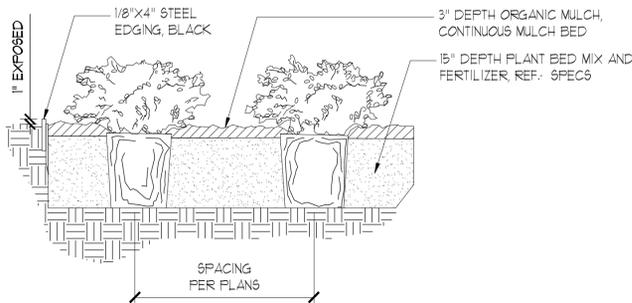


SHRUB PLANTING

NO SCALE 19

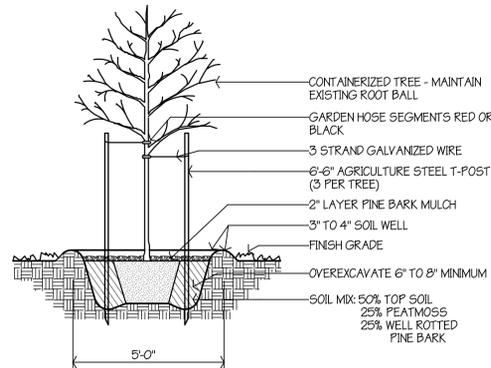

CONTAINER TREE PLANTING


1/2"=1'-0" 18

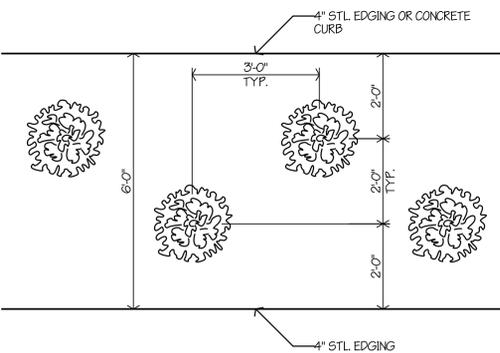

TYP. SHRUB LAYOUT


1/2"=1'-0" 17

LANDSCAPE PLAN

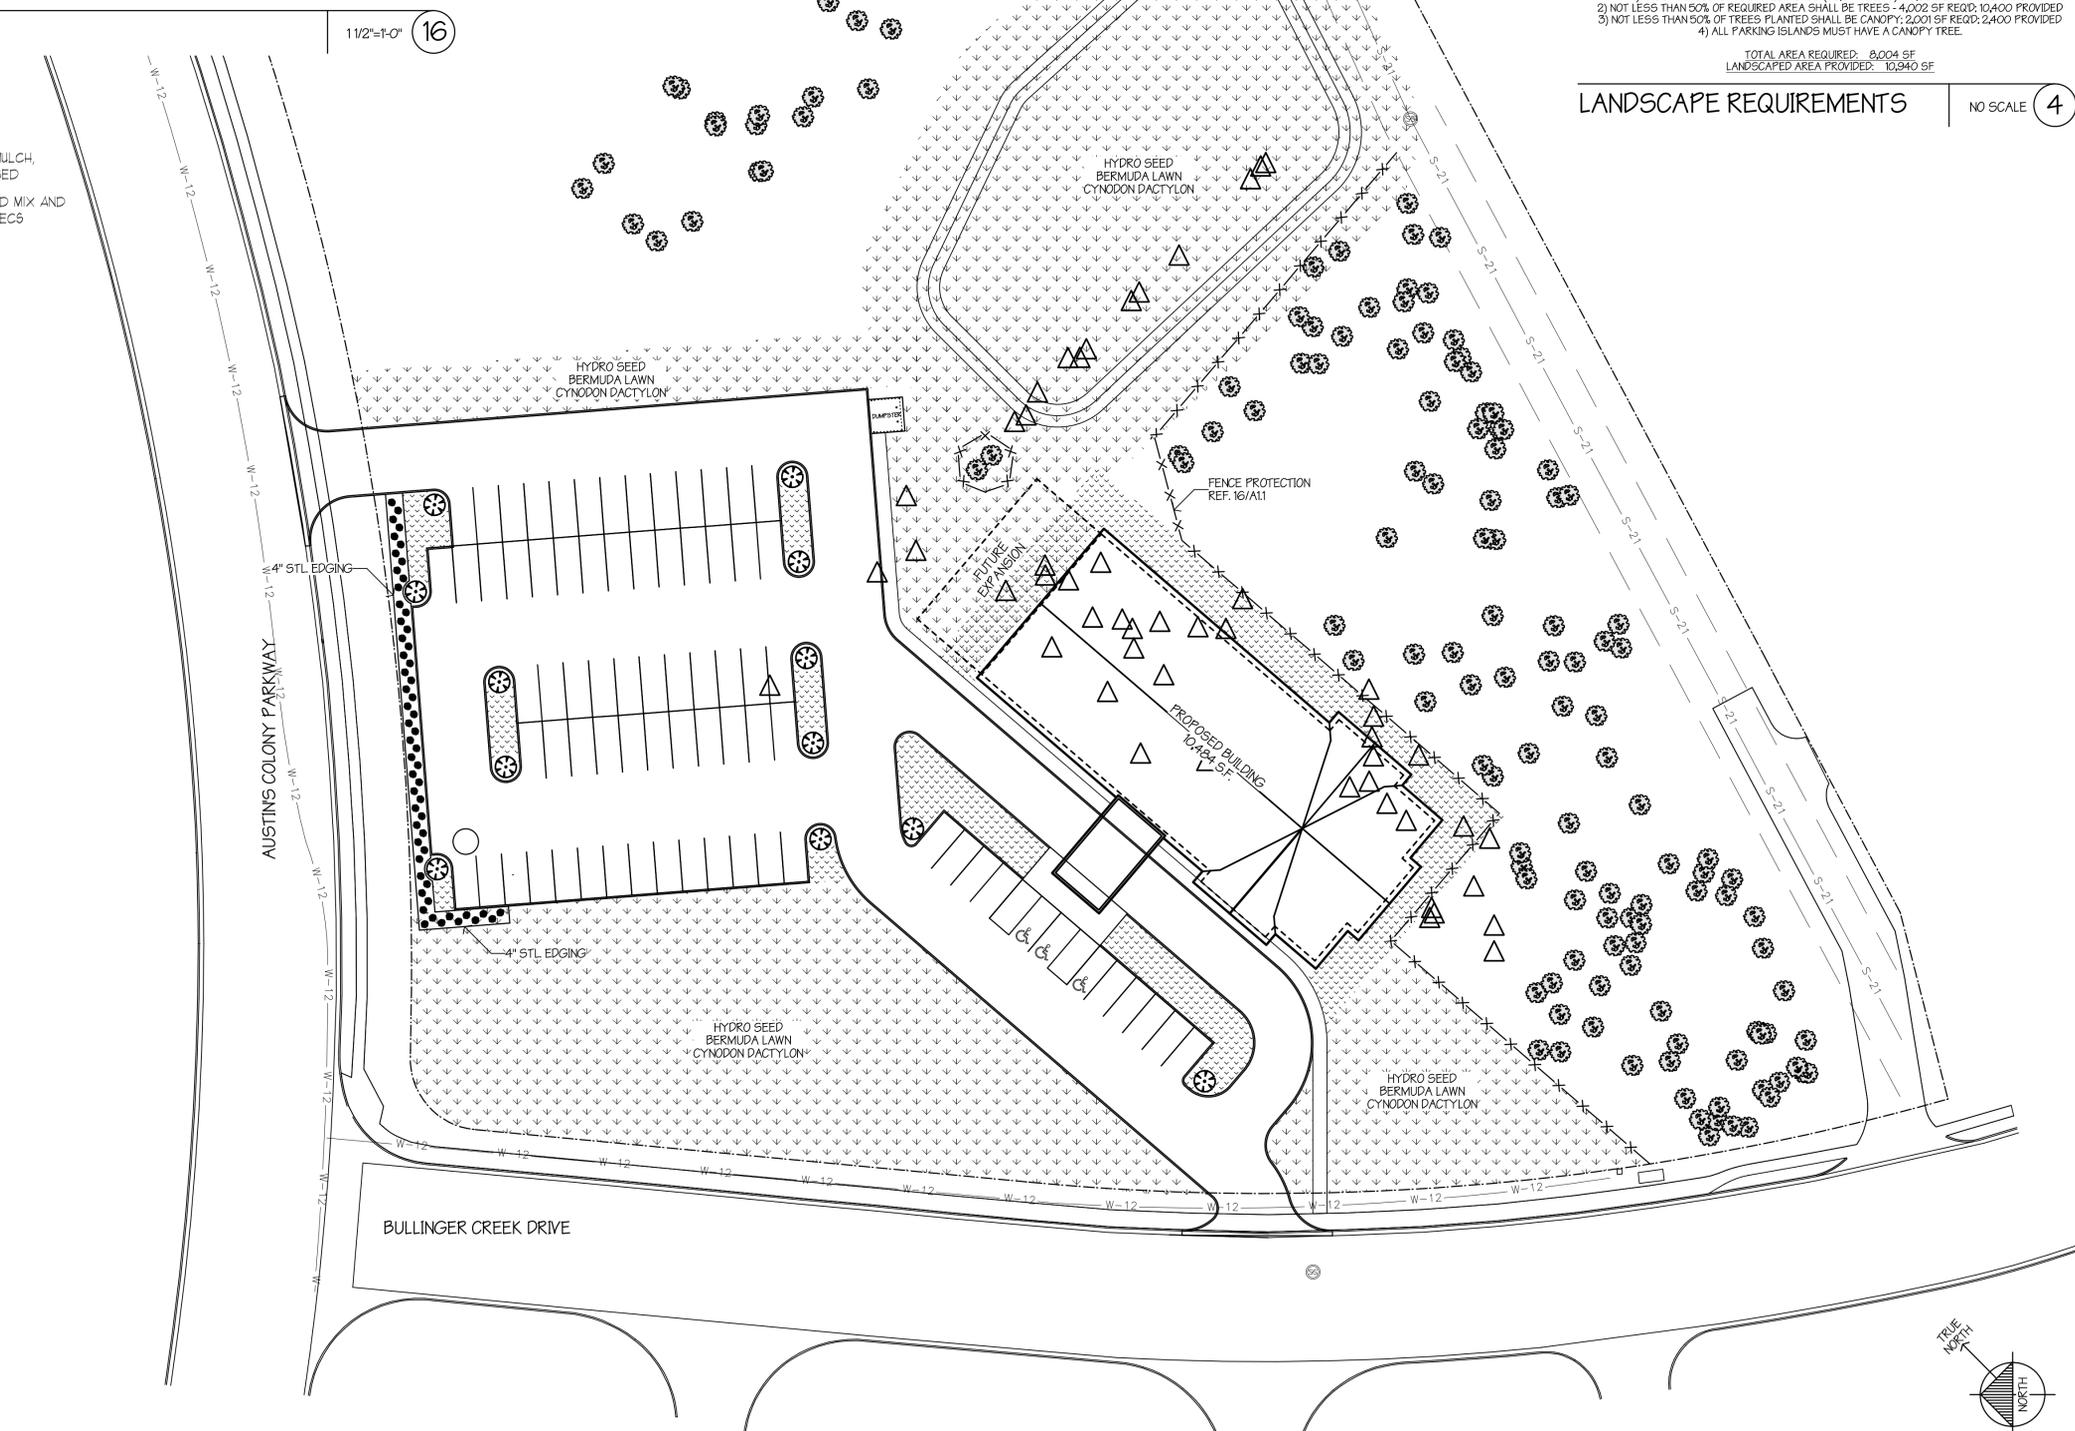

LANDSCAPE REQUIREMENTS

NO SCALE 4



PATTERSON ARCHITECTS
making a difference by Design
www.pattersonarchitects.net
701 South Texas Avenue
Bryan, Texas 77803
979.771.6036
design@patarch.com

CFI Companies
Consulting Engineers
Houston, Texas 77042
2500 Wilcrest Drive, Suite 150
Tel: (281) 808-1522
Fax: (281) 808-7556
CFI Project No.: 117183100
www.cficompanies.com

GESSNER ENGINEERING
CIVIL, CMT | GEOTECHNICAL | STRUCTURAL | SURVEYING
CORPORATE OFFICE
401 WEST 20TH STREET
BRYAN, TEXAS 77803
1.877.GESSNER (437.7637)
www.gessnerengineering.com
FIRM REGISTRATION NUMBERS:
TYPE F-7451, TBPLS F-10183910

J4 Engineering
PO BOX 5192
BRYAN, TEXAS
979.739.0567
GJONES@J4ENGINEERING.COM

FRED A. PATTERSON
REGISTRATION NUMBER: 16389
THESE DOCUMENTS ARE FOR INTERIM REVIEW AND ARE NOT INTENDED FOR REGULATORY APPROVAL, BIDDING, PERMIT, OR CONSTRUCTION PURPOSES.

NEW
PROVIDENCE CHURCH
BRYAN, TEXAS
2610 AUSTIN'S COLONY PKWY

Drawn By:	JMH
Checked By:	FP
Patterson Project No.:	2505
Building Inventory No.:	
Plot Date:	Feb 24, 2026
CAD File:	All Landscaping Plan 2505.dwg
Project No.:	
Sheet Title:	LANDSCAPING PLAN
Sheet No.:	A1.1