


MODEL	SIZE	BY PASS	L1	W1	H1	WEIGHT LBS
DMC3	3"	2"	7'-10"	4'-4"	4'-6"	10,000
DMC4	4"	2"	8'-8"	5'-0"	4'-6"	12,000
DMC6	6"	3"	11'-6"	6'-0"	4'-9"	12,000

PLAN VIEW

30" x 48" ALUMINUM HATCHWAY  
SPRING ASSISTED w/ SLAM-LOCK.

CONCRETE LID

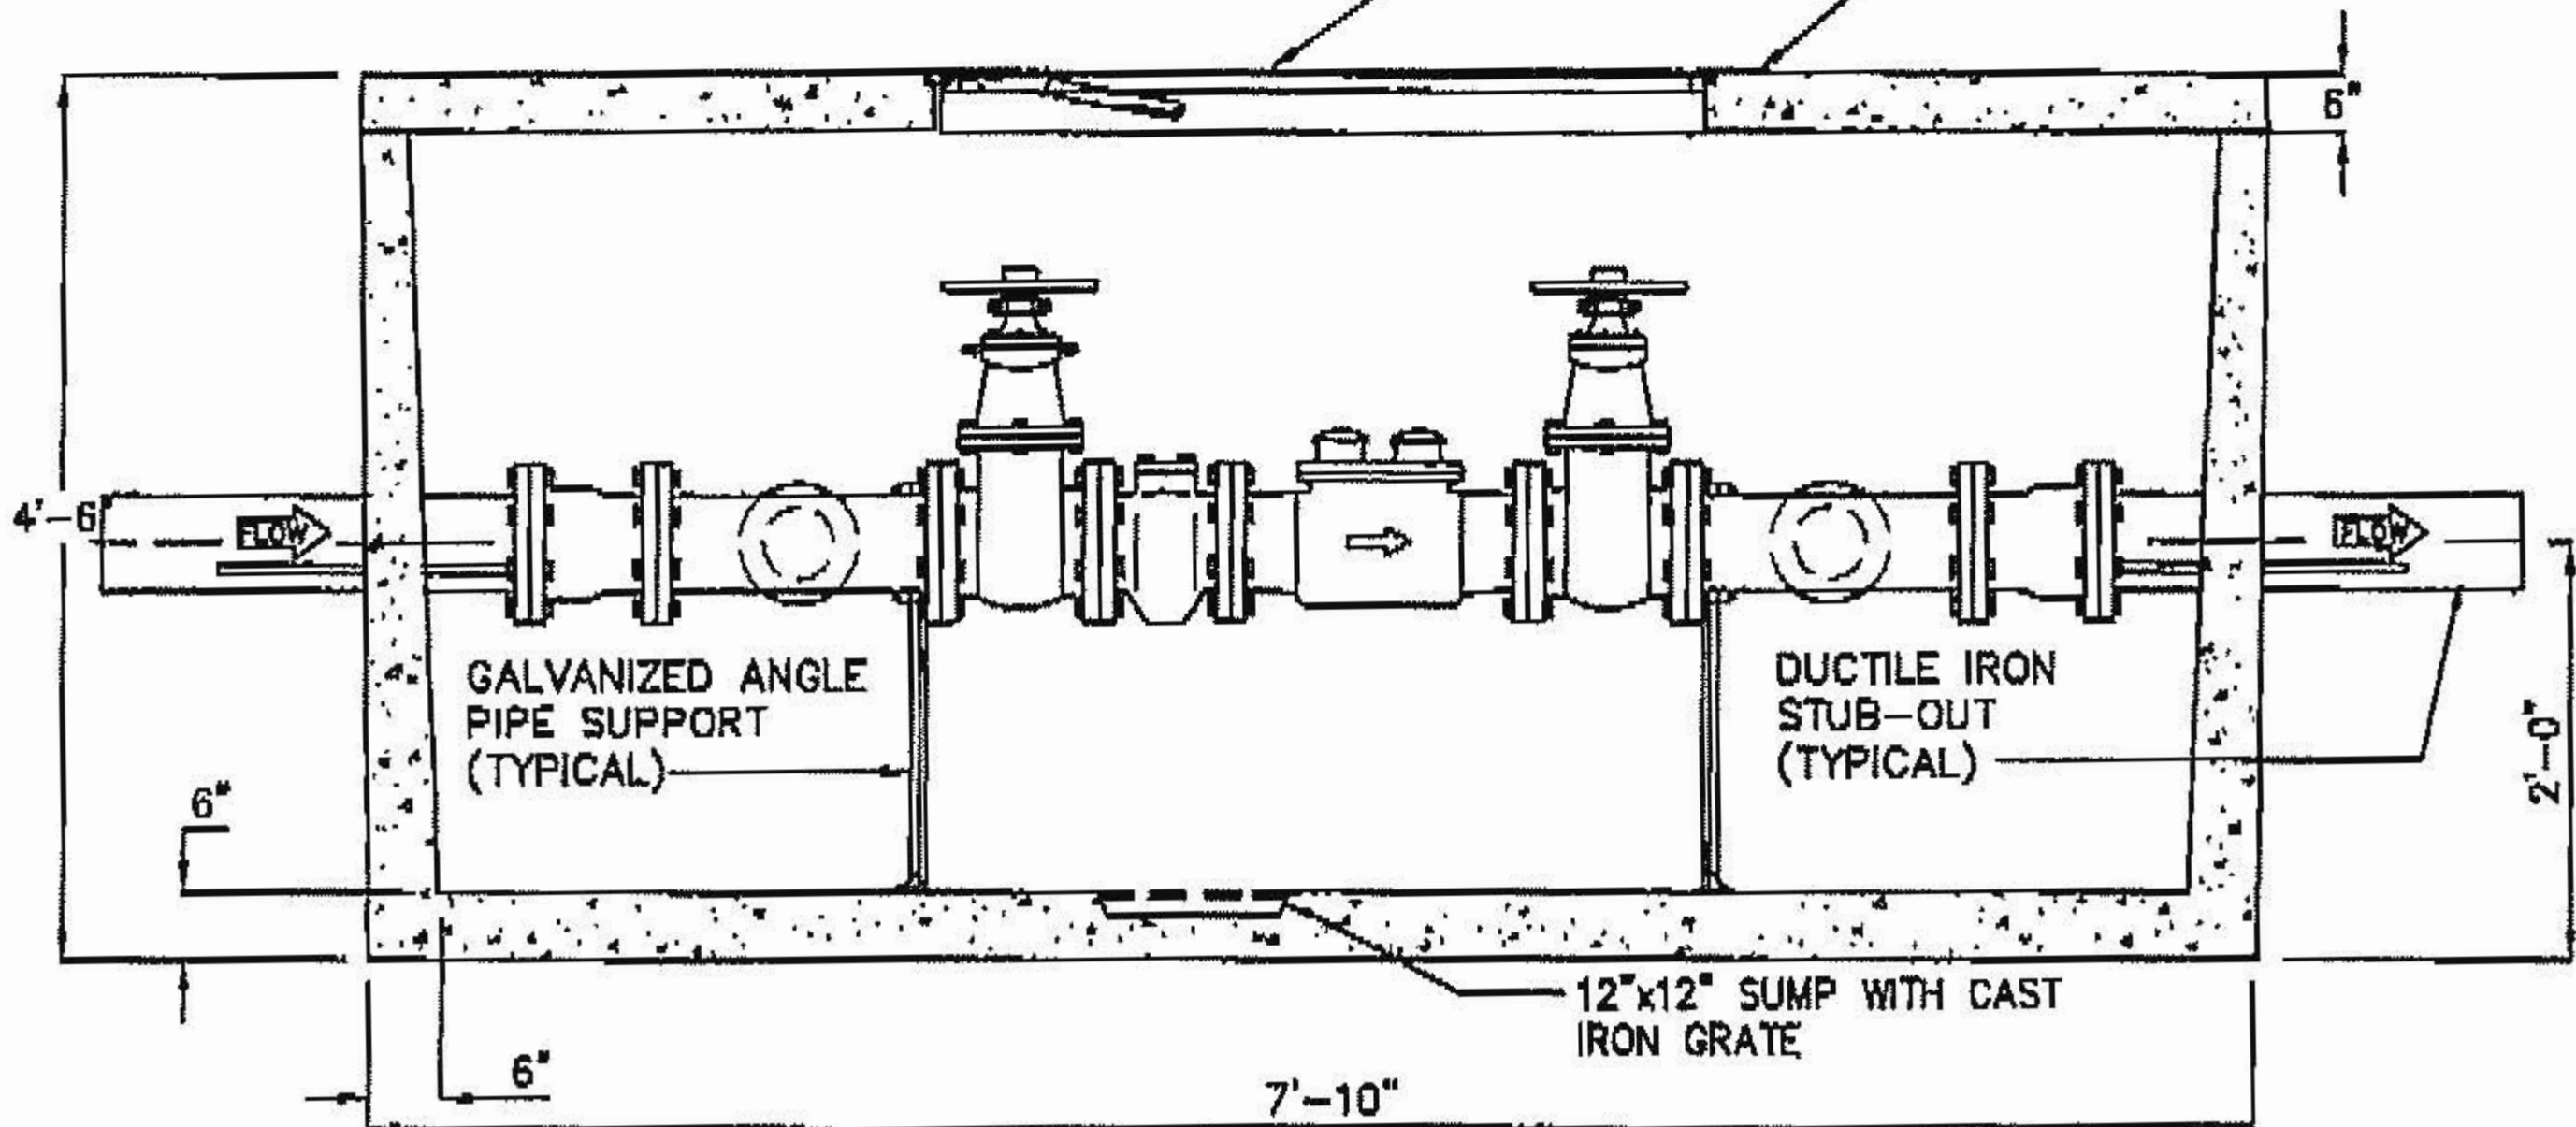

ELEVATION

© Park 2002

### Specifications

**CONCRETE :** Class 1 concrete with design strength of 4500 PSI at 28 days. Unit is of monolithic construction at floor and first stage of wall with sectional riser to required depth.

**REINFORCEMENT:** Grade 60 reinforced. Steel rebar conforming to ASTM A615 on required centers or equal.

**STEEL COVER:** 1/4" Aluminum diamond plate cover with extruded aluminum frame. Hatch to be furnished with 316 stainless steel snap lock hinges.

### Engineering Data

Field excavation and preparation shall be completed prior to delivery of assembly. Use dimensional data as shown. Pipe, valves and fittings of the assembly are approved by one or more of the following associations:



PROJECT : BRAZOS COUNTY EXPO CENTER

CUSTOMER : CITY OF BRYAN

ORDER # : 06-11809

DATE : 3-30-2007



800-256-8041  
www.park-USA.com

"Expect the Best"

**3" DOMESTIC COMPOUND  
WATER METER ASSEMBLY**

SCALE NONE

DWG. NO.

REV.

DATE 01/06

DMC-3

A

DMC3-0611809