
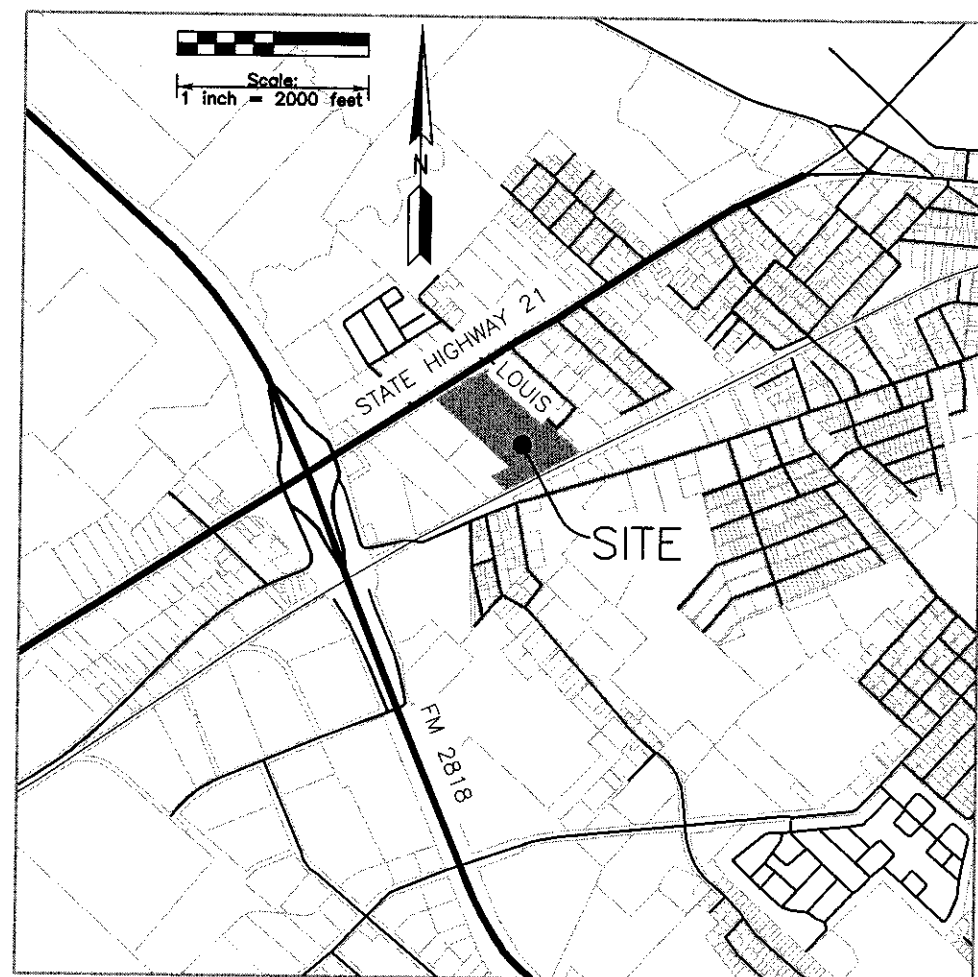


PROJECT BENCHMARK: 60 D NAIL at northwest entry to site.

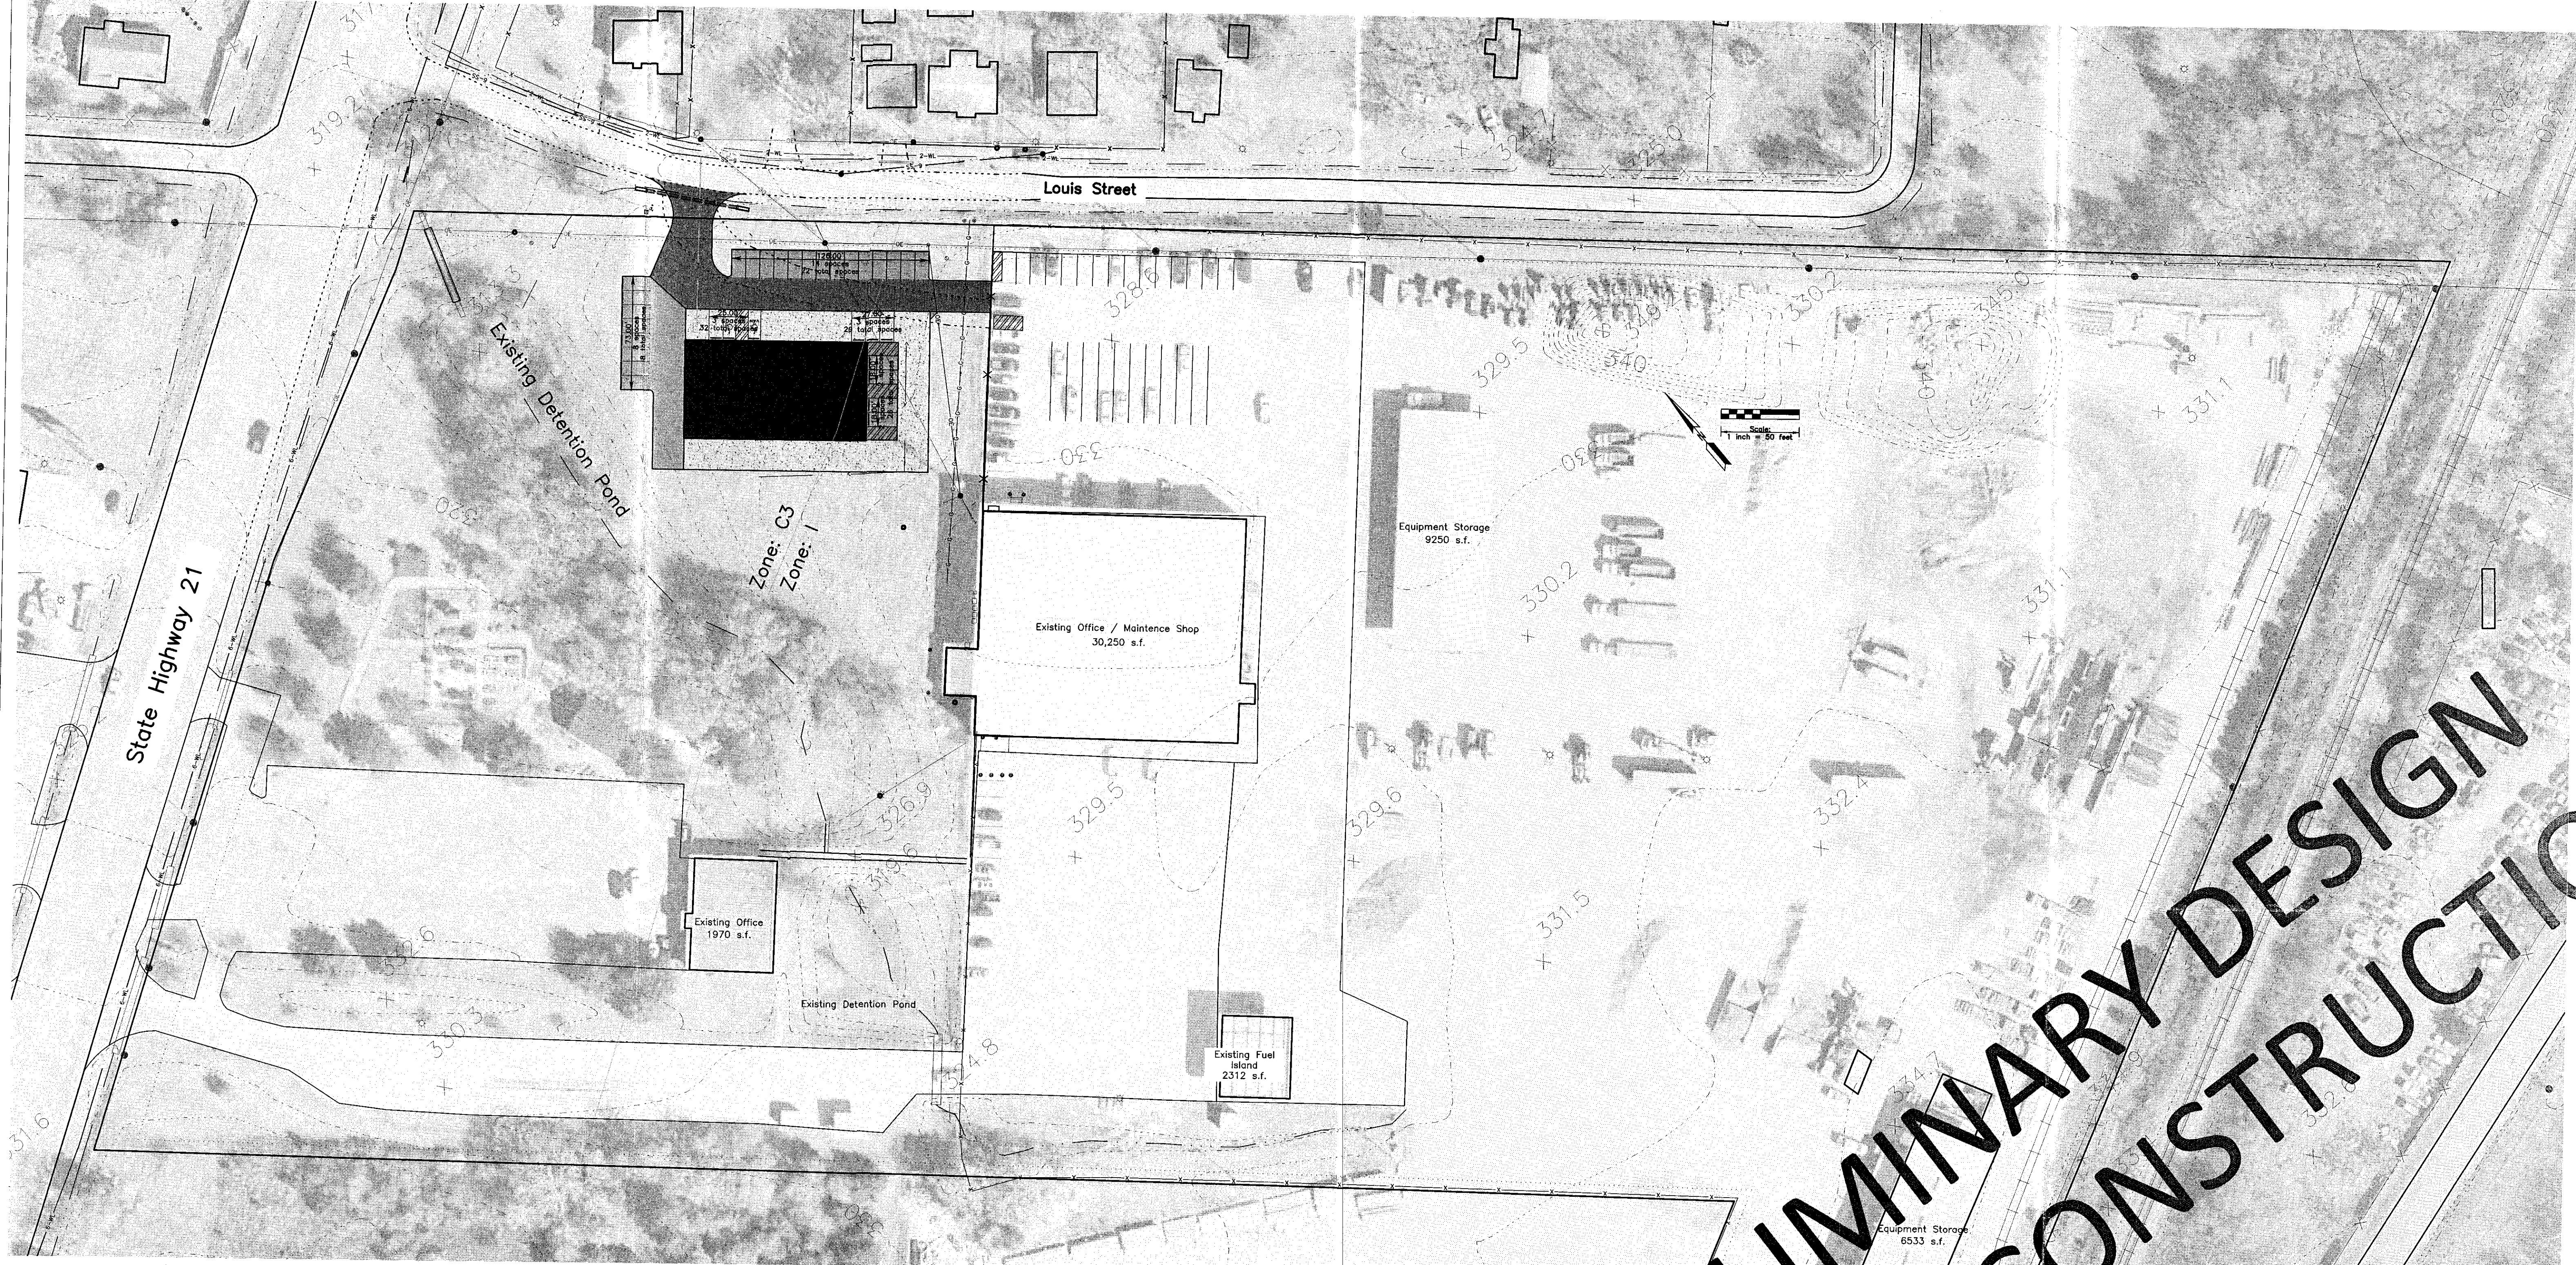

VICINITY MAP

#### GENERAL CONSTRUCTION NOTES:

1. It shall be the responsibility of the Contractor to verify the exact location of ALL existing underground utilities. Furthermore, the Contractor shall contact all utility company representatives a minimum of 48 hours in advance of any excavation.

- a. Contact Dig Tesa @ 1-800-344-8377
- b. Contact Bryan Water Utilities @ 209-5900
- c. Contact Josh Norton @ AT&T 774-2508
- d. Contact Mike Lavender @ Suddenlink 846-2229
- e. Contact Isabel Cantu @ BTU 821-5770
- f. Contact Mitchell Gas @ 778-4460
- g. Contact Union Pacific Resources @ 778-8525
- h. Contact Richard Wallace @ Verizon 821-4752

2. All construction shall be in accordance with the 2012 B/C/S Unified Technical Specifications, Water and Sewer and Generals and 2012 B/C/S Unified Design Details. All inspection shall be performed by the staff of the City Engineer of Bryan. All construction shall be coordinated with the City of Bryan City Engineer.

3. In lieu of using the construction materials indicated in these plans, the Contractor shall obtain written approval from the City Engineer for any substitution prior to construction. Requests for changes should include product information and an engineer's seal where applicable. The contractor shall be financially responsible for the engineer's time spent reviewing changes and redesigning based on contractors requests.

4. Trench Safety Requirements shall be in accordance with O.S.H.A. Standard 29 CFR Part 1926 Subpart P. For general requirements, see Sheet S3 for details.

5. TRENCHING AND BACKFILLING: All trenching and backfilling shall conform to the specifications set out herein. Testing shall be provided by a certified laboratory, at the Owner's expense, to verify these standards. Any retesting due to substandard work shall be at the expense of the Contractor. Structural areas shall include all sidewalks and shall extend 5' beyond the curb lines of all streets, alleys and parking areas.

6. It is the responsibility of the contractor to comply with all State and Federal Regulations regarding construction activities near energized overhead power lines. Additionally, the contractor shall coordinate all proposed work and procedures with BTU.

7. All materials & labor not identified as a Separate Bid Item shall be considered subsidiary to the item in which it is used. All materials and equipment shall be both furnished and installed unless otherwise noted.

8. The Contractor must provide construction staking from the information provide on these plans.

9. All soil exposed by construction shall receive cellulose fibermulch seeding.

10. Trenches may be left open overnight if properly barricaded.

11. Adjustment of Water Meters, Valves, Manholes, Irrigation Systems, and any other Public or Private Utility, etc. are not separate pay items. The Price of the adjustment shall be subsidiary to the construction of Sewer Line, Force Main, etc.

12. The contractor shall coordinate with Suddenlink Communications, BTU, Atmos Energy, and Verizon to adjust the location of existing facilities.

13. The contractor is responsible for traffic control. This is not a separate pay item.

14. No spoil areas are available on this site.

15. All signage will be permitted separately.

16. The Contractor shall be responsible for the containment and proper disposal of all liquid and solid waste associated with this project. The contractor shall use all means necessary to prevent the occurrence of windblown litter from the project site.

17. The Contractor shall assure that inspection of all work is completed by the Geotechnical Engineer and/or the owner's representative.

18. Demolition/Construction Waste - Site is required to provide containment for waste prior to and during demolition/construction. Solid waste roll off boxes and/or metal dumpsters shall be supplied by City or City permitted contractor(s) only.

19. Irrigation System - Potable water supply must be protected by either the atmospheric or pressure vacuum breaker, or testable double check valve assembly, and installed as per City Ordinance.

20. Washout area for concrete trucks is provided at the designated "Proposed Staging Area", shown on sheet C6.01, "Staging and Sign Plan".

#### SITE PLAN NOTES:

1. Name of Project: BRAZOS COUNTY FLEET MAINTENANCE FACILITY, 6324 S.F.

2. Legal Description: BRAZOS COUNTY PUBLIC WORKS CENTER, BLOCK 1, LOT 1, 18.84 Acres

3. Owner: BRAZOS COUNTY, TEXAS

Mailing Address: Brazos County Administration Building 200 South Texas Ave. Suite 352 Bryan, TX 77803

4. Engineer: Mitchell & Morgan, L.L.P. 3204 Earl Rudder Fwy S College Station, Texas 77845 (979) 260-6983

5. Zoning: C-3 (Commercial)

6. Existing Use: Mixed - Vacant Proposed Use: Industrial

7. Setbacks: Per City of Bryan Ordinances

8. Site Area: 18.84 acres

9. Water Demands : 26 gpm by fixture units.

10. Sanitary Demands: 26 gpm by fixture units.


11. Parking: Required Parking: 6324 s.f. \* 1 Space/ 200 s.f. = 32 spaces.

Provided Parking: 32 Proposed.

This site does not lie within the 100-year floodplain boundary per FEMA's Flood Insurance Rate Map panel 48041C0195E.

Effective Date: July 7, 2014.

PRELIMINARY DESIGN  
NOT FOR CONSTRUCTION




T.979.260.6963  
F.979.260.3564  
FIRM# 1443  
3204 EARL RUDDER FWY S.

COLLEGE STATION, TX 77845

PLAN & DESIGN SPECIALISTS IN  
CIVIL ENGINEERING • HYDRAULICS  
HYDROLOGY • UTILITIES • STREETS  
SITE PLANS • SUBDIVISIONS

www.mitchellandmorgan.com



Jan 2015  
Designed By: JM  
Drawn By: JM

Prepared For:  
Brazos County  
Purchasing Department  
Brazos County Building  
200 South Texas Ave.  
Suite 352  
Bryan, TX 77803

Revisions

Overall Site Plan  
BRAZOS COUNTY FLEET MAINTENANCE  
FACILITY - BRYAN, TEXAS

OSP

Of 12 Sheets