

L10 S 59'42'01" E 33.12'

L11 S 6°34'13" E 18.78'

C11 | 1°38'46" | 549.00' | 15.77' | 7.89' | S 33°08'07" E | 15.77'

Harvey Ranch Road

70' R.O.W. ~ 24' Asph. Pvmt.

This subdivision plat was duly approved by the Commissioners Court of Brazos County, Texas, as the Final Plat of such subdivision on the ____ day of


Signed this the _____ day of _______, 20_____.

l, Gregory Hopcus, Registered Professional Land Surveyor No. 6047, in the State of Texas, hereby certify that this plat is true and correct and was prepared from an actual survey of the property and that property markers and monuments were placed under my supervision on the ground, and that the metes and bounds describing said subdivision will describe a closed geometric

GENERAL NOTES:

1. ORIGIN OF BEARING SYSTEM: The bearing system is based on Grid North, Texas State Plane Coordinate System, Central Zone, NAD83. The actual measured distance to the monuments are

- According to the Flood Insurance Rate Maps for Brazos County, Texas and Incorporated Areas, Map Number 48041C0250E, effective May 16, 2012, no portion of this property is located within
- The water supplier for this development is the Wickson Creek Special Utility District. These waterlines will provide the required flow to fire hydrants to meet fire protection requirements. 6. The Private Drainage Easements will be maintained by the Lot Owners or the Homeowners'
- 7. Building Setbacks are 25' Adjacent to all streets according to Brazos County Subdivision and Development Regulations. Additional Building Setbacks may be required by Deed Restrictions or
- 8. No on-site sewage facility (OSSF) Authorization to Construct permit for an individual lot will be issued without first having a site evaluation report on file for that individual lot. The site
- condition and the natural flow of water in the existing drainage ways shall not be obstructed. 10. Lots to be sewered by individual On-Site Sewage Facilities (OSSF) which must comply with all county & state OSSF regulations. All OSSF construction must have an "Authorization to
- shall not encroach the 100' or 150' sanitary zone of a private or public well, respectively. 11. There shall be a 5' wide Easement for anchors and guy wires necessary to help support
- 12. All interior lot lines shall have a 20' Public Utility Easement centered on the lot line. All rear lot lines that adjoin another lot will have a 10' Utility Easement along the common lot line, except
- 13. Brazos County will be responsible for maintaining Public Drainage Easements. The Homeowners'
- 14. Lot 20, Block 1 and Lot 12, Block 2 shall not have direct access to Hardy Weedon Road.
- 15. Except where otherwise indicated, 1/2-inch iron rods are set at each lot corner:
- 16. Planning Exception Request Number PE21-03 was approved by the Planning and Zoning Commission on December 16, 2021 to allow Lots 16-19 in Block 1 to have a reduction in Lot
- reconstruct, add to, maintain, inspect, patrol, enlarge, repair, remove and replace said facilities upon, over, under, and across the property included in the P.U.E., and the right of ingress and egress on property adjacent to the P.U.E. to access electric facilities.

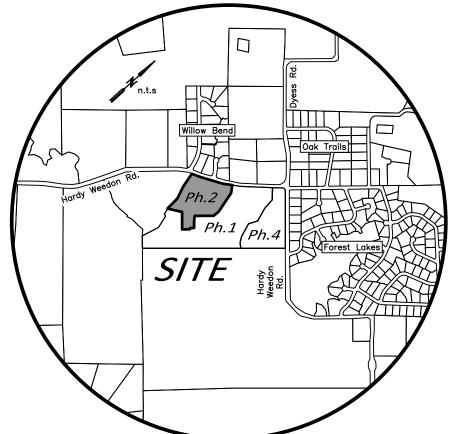

VICINITY MAP

FINAL PLAT

COOK CROSSING PHASE 2

LOTS 15-20, BLOCK 1 & LOTS 9-12, BLOCK 2 14.60 ACRES

> THOMAS J. ALLCORN LEAGUE, A-61 BRAZOS COUNTY, TEXAS MARCH, 2022

Cook Crossing, LLC P.O. Box 3462 Bryan, TX 77805 (979) 777-1677

McClure & Browne Engineering/Surveying, Inc. 1008 Woodcreek Dr., Suite 103 College Station, Texas 77845