


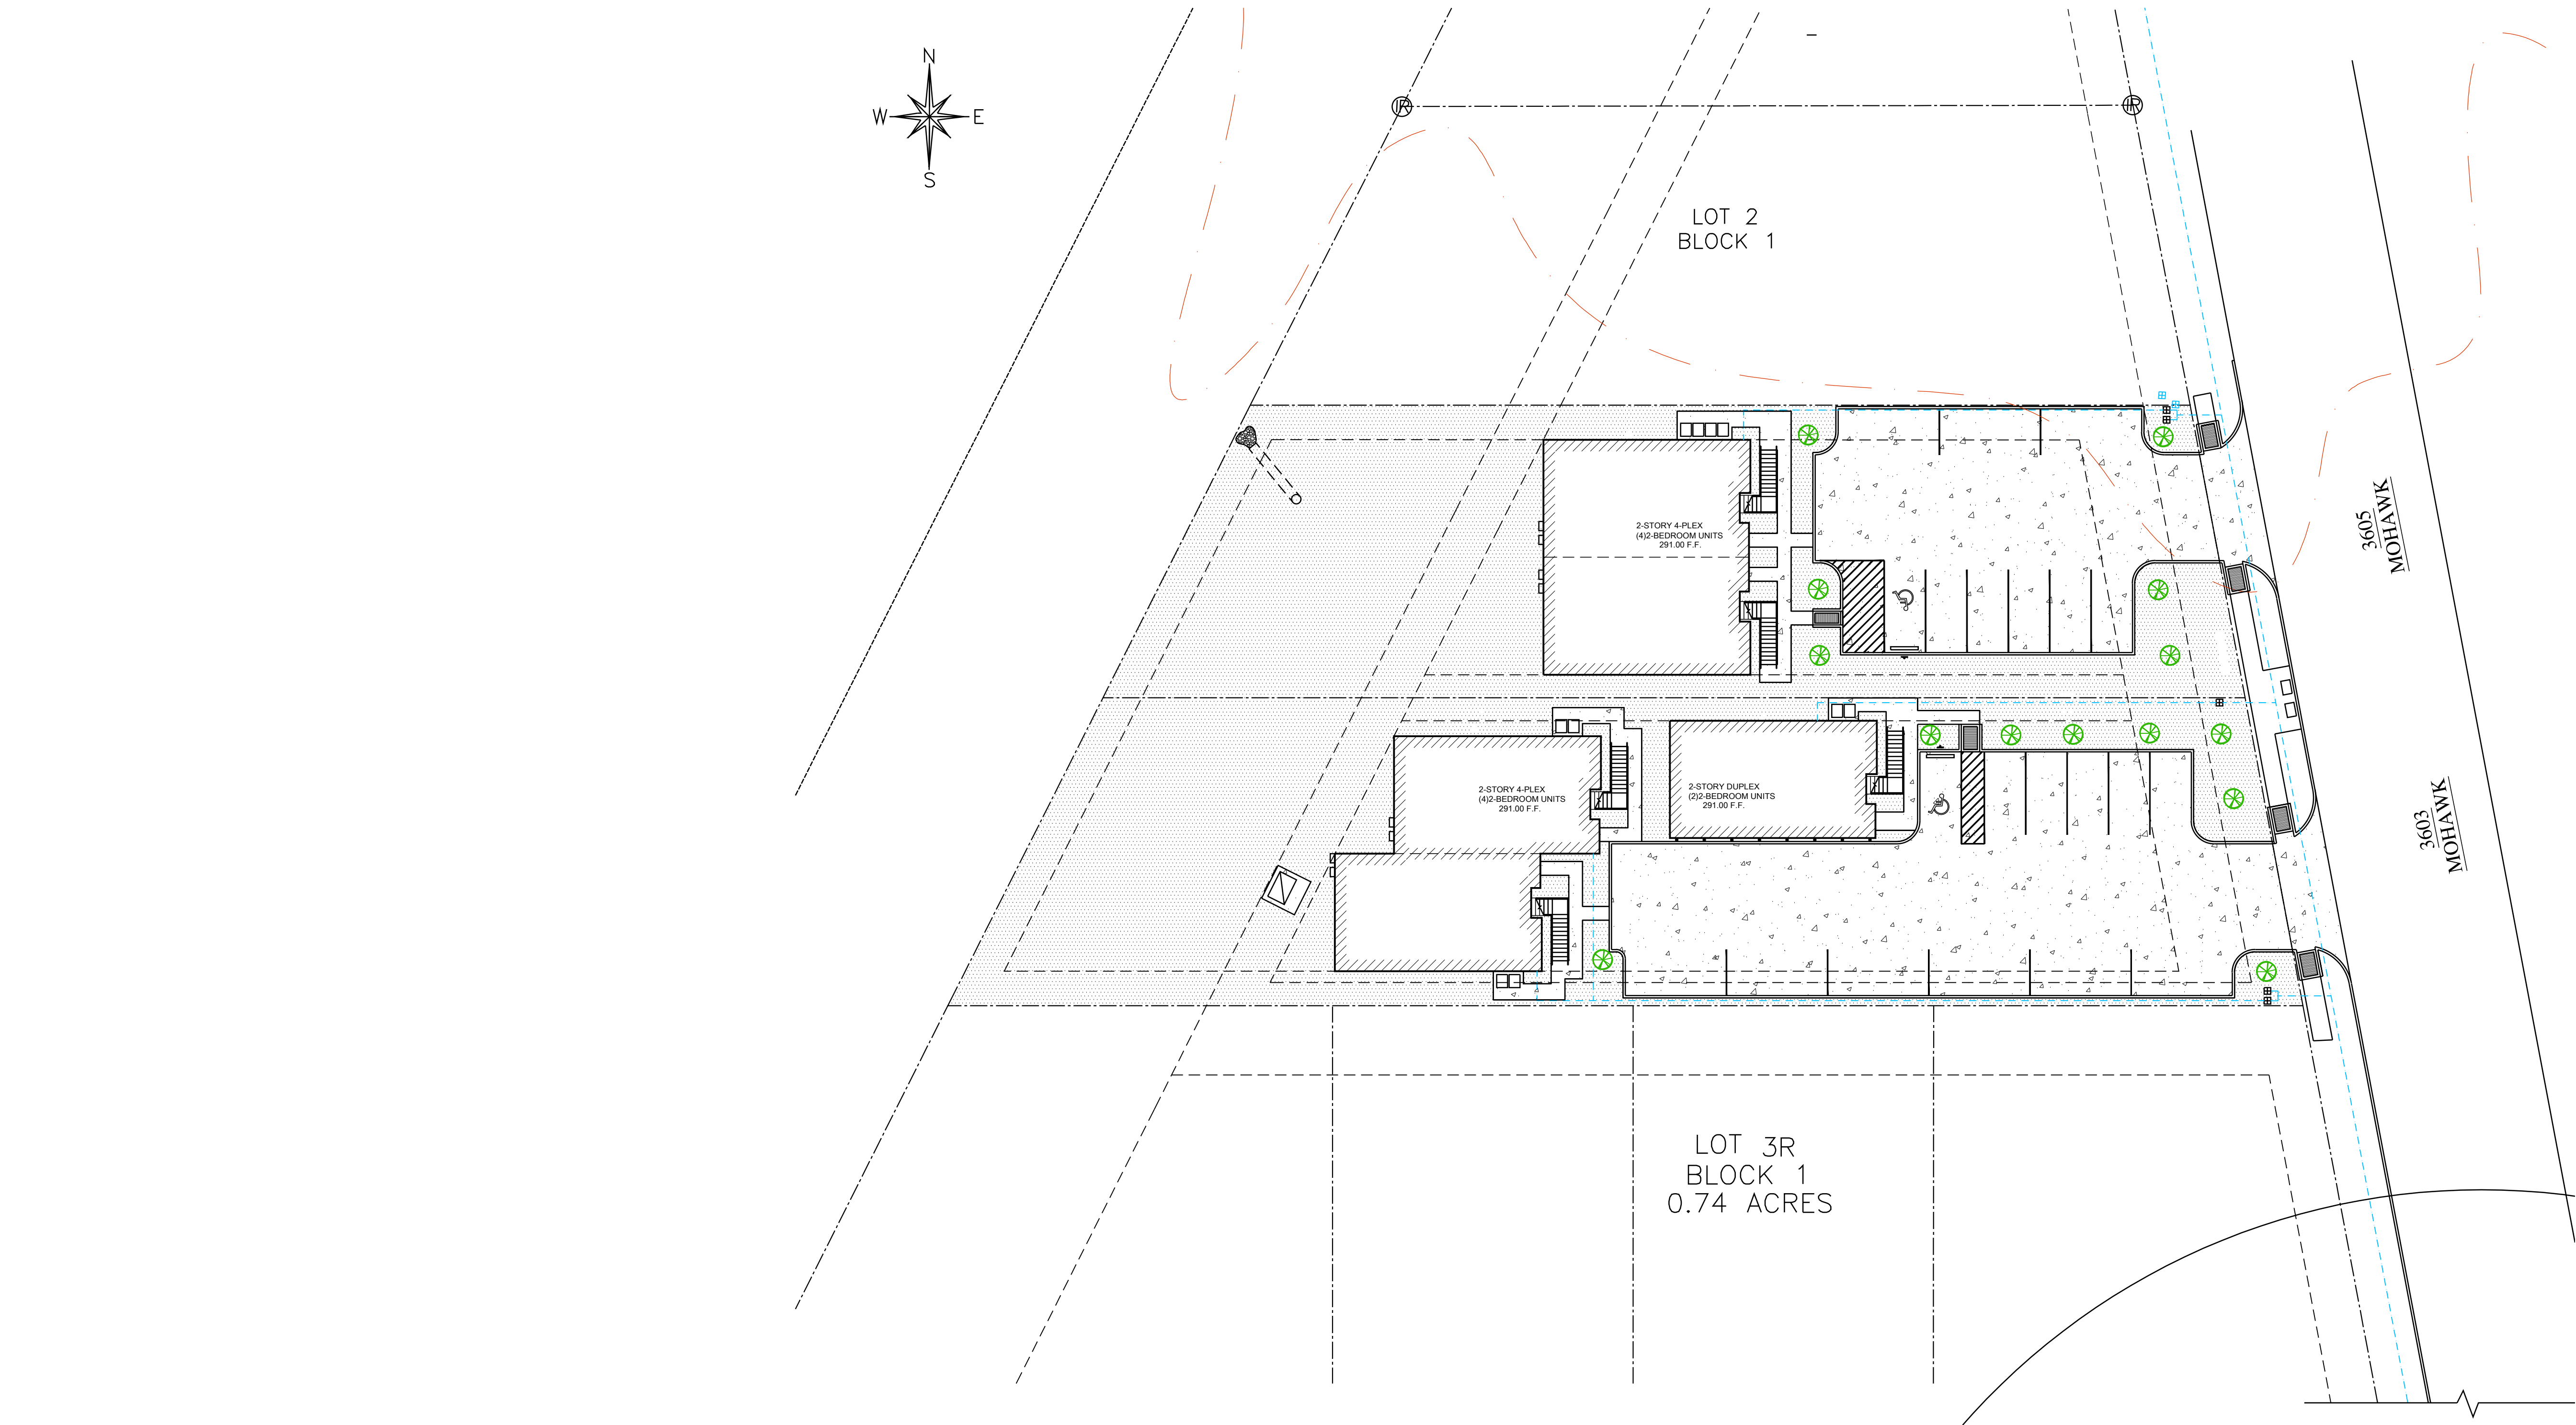

LANDSCAPING PLAN

SCALE: 1" = 20'-0" | 01

PROPOSED LANDSCAPING SCHEDULE LOT-3R1								
SYMBOL	NO. OF PLANTS	SIZE	BOTANICAL NAME	COMMON NAME	TYPE	NOTES	POINTS EACH	TOTAL POINTS
	8	8"or HIGHER CALIPER	QUERCUS VIGINIANA	LIVE OAK	NEW CANOPY TREE	30 GALLON	200	1600
	ENTIRE SITE	ALL UNDEVELOPED AREAS	QUERCUS VIGINIANA	ST. AUGUSTINE GRASS	GROUND COVER		-	-
TOTAL								1,600

LANDSCAPING REQUIREMENTS LOT-3R1

TOTAL SQUARE FEET OF THE SITE = 18,178
TOTAL SQUARE FEET OF DEVELOPED AREA = 10,096
10,096 x 15%= 1,514.4 OR 1,515

THERE ARE A TOTAL OF 1,515 LANDSCAPING POINTS REQUIRED FOR THIS PROJECT.

TOTAL PROVIDED 1,600.

THE TOTAL LANDSCAPING REQUIREMENTS AMOUNT TO OR EQUAL TO 15% OF THE DEVELOPED AREA BASED ON SEC. 62-429 OF C&B DEVELOPMENT CODE.

- ALL PLANTINGS PROPOSED ARE TO BE NEW PLANTINGS. NO EXISTING TREES ARE USED IN OUR LANDSCAPING CALCULATIONS.
- THE NEW PROPOSED IRRIGATION PLAN WILL BE A DIFFERED SUBMITTAL.

PROPOSED LANDSCAPING SCHEDULE LOT-3R2								
SYMBOL	NO. OF PLANTS	SIZE	BOTANICAL NAME	COMMON NAME	TYPE	NOTES	POINTS EACH	TOTAL POINTS
	6	8"or HIGHER CALIPER	QUERCUS VIGINIANA	LIVE OAK	NEW CANOPY TREE	30 GALLON	200	1200
	ENTIRE SITE	ALL UNDEVELOPED AREAS	STENOTAPHRUM SECUNDATUM	ST. AUGUSTINE GRASS	GROUND COVER		-	-
TOTAL								1,200

LANDSCAPING REQUIREMENTS LOT-3R2

TOTAL SQUARE FEET OF THE SITE = 14,403
TOTAL SQUARE FEET OF DEVELOPED AREA = 6,712
6,712 x 15%= 1,006.8 OR 1,007

THERE ARE A TOTAL OF 1,007 LANDSCAPING POINTS REQUIRED FOR THIS PROJECT.

TOTAL PROVIDED 1,200.

THE TOTAL LANDSCAPING REQUIREMENTS AMOUNT TO OR EQUAL TO 15% OF THE DEVELOPED AREA BASED ON SEC. 62-429 OF C&B DEVELOPMENT CODE.

- ALL PLANTINGS PROPOSED ARE TO BE NEW PLANTINGS. NO EXISTING TREES ARE USED IN OUR LANDSCAPING CALCULATIONS.
- THE NEW PROPOSED IRRIGATION PLAN WILL BE A DIFFERED SUBMITTAL.