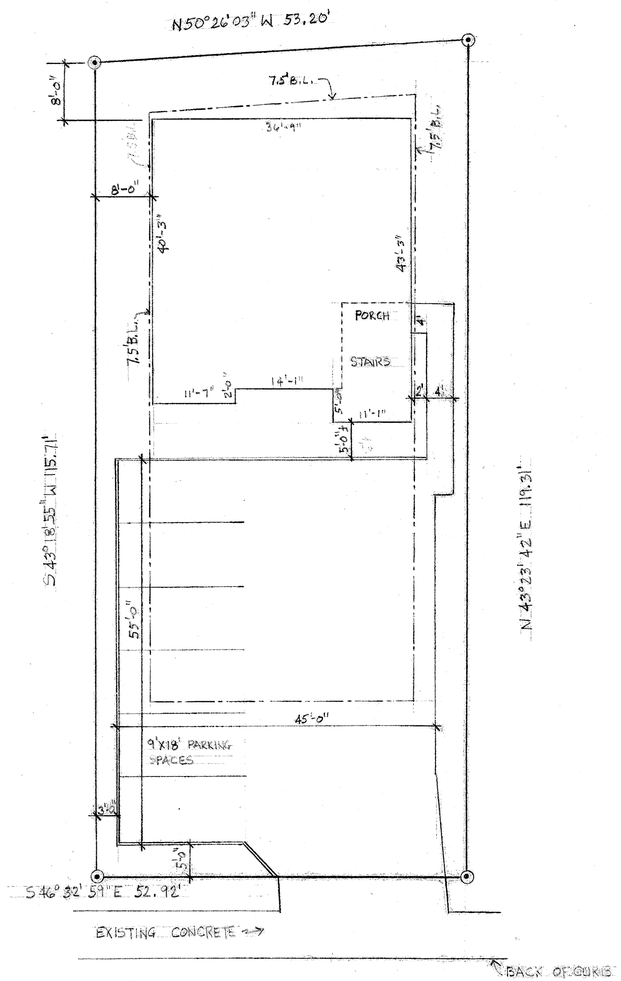

COLLEGE MAIN

NORTH

SITE PLAN

1" — 10'-0"

0.143 ACRE TRACT
J.E. SCOTT LEAGUE, A-50

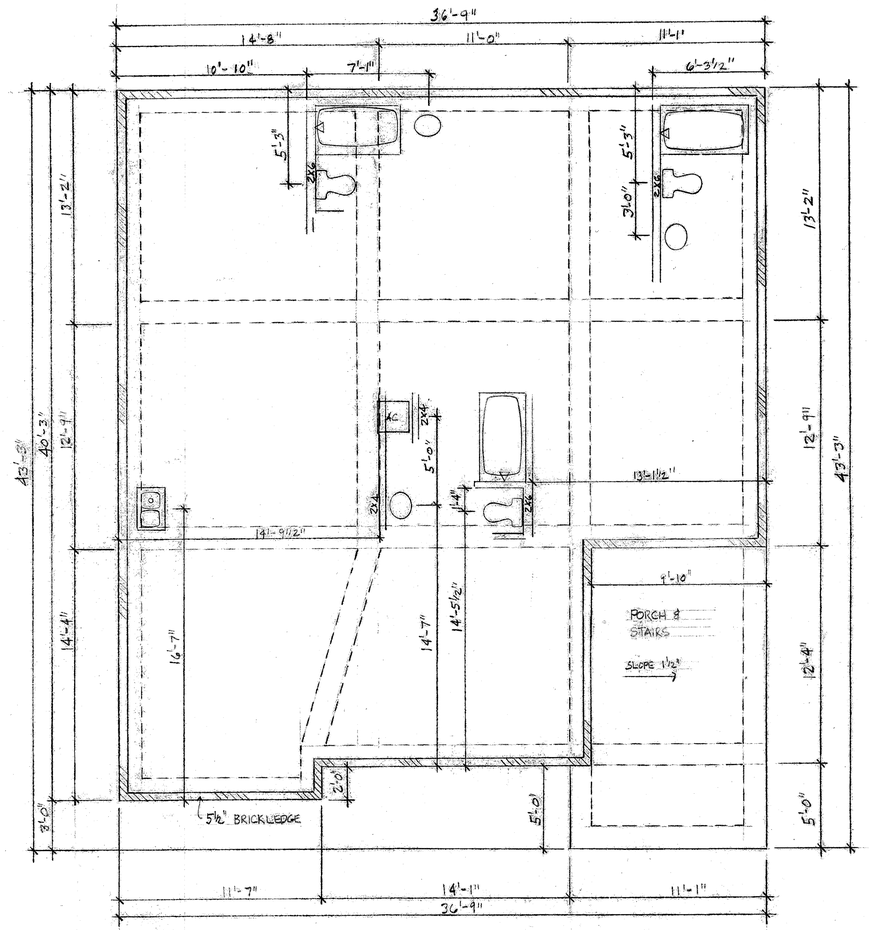

FOUNDATION NOTES:

MINIMUM 5" CONCRETE SLAB WITH #4 AT 16" O.C. EACH WAY ON 6 MIL POLY ON COMPACTED SAND OR LOW P.I. FILL.

EXTERIOR BEAMS 15" W x 42" D
INTERIOR BEAMS 15" W x 36" D

ALL BEAMS TO HAVE 3-#6 TOP AND BOTTOM AND #3 STIRRUPS @ 30" O.C.

FOUNDATION PLAN

1/4" — 1'-0"

SLAB AREA = 1,484 S.F.

DIAGONAL FOR SQUARING
36'-9" x 43'-3" = 56'-9"

DATE:	A PROPOSED NEW APARTMENT BUILDING FOR:
SHEET: 1 of 5	BETTY HUBENAK
	4400 COLLEGE MAIN BRYAN, TEXAS